

TravelLight3

Specifications*



BRIGHTNESS

2500 Lumens (Standard)


1800 Lumens (Economy)

RESOLUTION

1024 x768 XGA (Native)

1600X1200 UXGA (Supported)

DISPLAY TYPE

Texas Instruments  DLP

0.55" DMD DLP

CONTRAST RATIO

2000:1

ASPECT RATIO

4:3 Native

16:9 Compatible

THROW RATIO

1.9 ~ 2.2 (x screen width)

PROJECTION LENS

Manual Zoom / Focus

ZOOM RATIO

1.15:1

DIAGONAL IMAGE SIZE

34" - 260" / 86.4cm - 660.4cm

THROW DISTANCE

4.9' - 32.8' / 1.5m - 10.0m

KEystone

+/- 15° Vertical

LAMP

200 watt SHP114

LAMP LIFE

2000 (Standard)

3000 (Economy)

INPUTS

Audio (3.5mm)

VGA (component)

Composite (3.5 mm)

S-Video (3.5 mm)

OUTPUTS

N/A

PROJECTOR CONTROLS

USB

COMPATIBILITY

VGA, SVGA, XGA, SXGA,

UXGA, Mac

EDTV / SDTV / HDTV

480i/p, 576i/p, 720p, 1080i

FCC CERTIFICATION

FCC-B, UL, c-UL

VIDEO COMPATIBILITY

NTSC, NTSC 4.43, PAL B/G/H/I/M/N 60,

SECAM

AUDIO

1 x 1w Mono Speaker

DECIBEL RATING

37dB (Standard) / 34dB (Economy)

H-REFRESH RATE

15, 30-90 kHz

V-REFRESH RATE

43-87 Hz

POWER SUPPLY

AC 110 ~ 240 Volts

(auto ranging)

POWER CONSUMPTION

260W (Standard)

210W (Economy)

<5W standby

DIMENSIONS (WxDxH)

8.7" x 7.0" x 2.8" Inches

22.1cm x 17.8cm x 7.1cm

WEIGHT

3.2 Lbs / 1.45 Kg

WARRANTY

3 year parts & labor / 90 day lamp

Special features of the TravelLight3 include:

Upgrade to the industry favorite - TravelLight2 projector!



Extreme portability— Just 3.2 lbs!.

Fan speed control—

Optional fan speeds for use in high altitude locations.

Menu reset option—Reset various

settings without defaulting all the projectors settings.

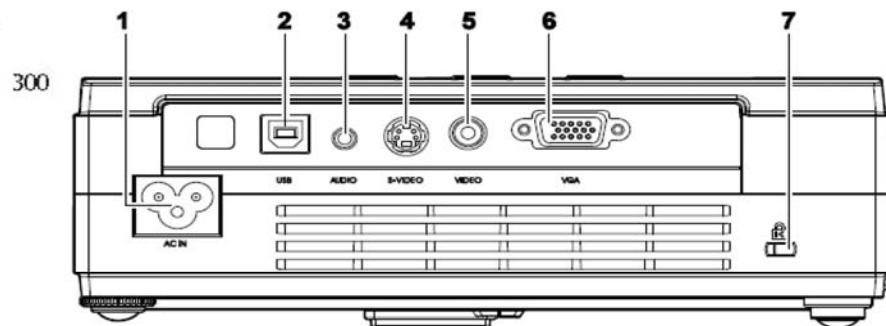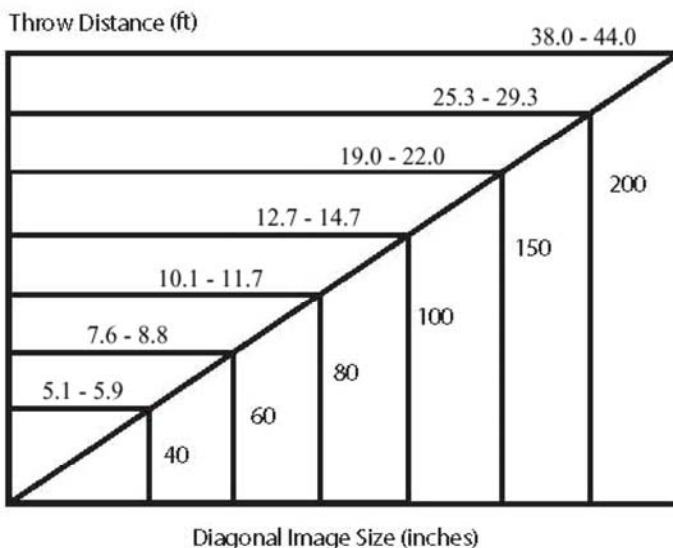

- 1.) AC In
- 2.) USB
- 3.) Audio
- 4.) S-Video
- 5.) Video
- 6.) VGA
- 7.) Security lock