




## **ImagePro 8746A Miniature Portable DLP projector**

- Ultra Light, 2.4 lbs.
- XGA resolution
- 1400 lumens brightness
- Small, quiet
- Extremely easy to use

**Two year warranty**

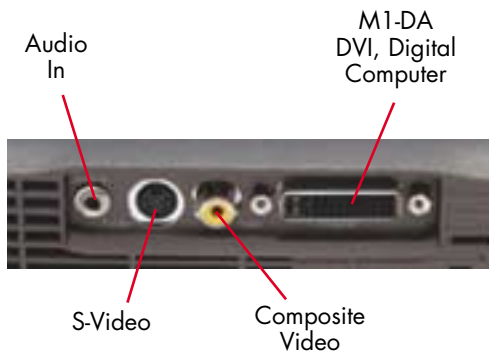

***Small, quiet, and portable.  
Easy to use for traveling!***



# **8746A DUKANE**

# ImagePro 8746A

## Ultra portable DLP projector

### A way to present your images anywhere

The Dukane ImagePro 8746A provides exceptional performance with tremendous portability. It's the ideal way to present rich, saturated color images from your PC or video source.

The projector is one-half the size of most laptop computers while providing a full set of features. Use it as your traveling companion or just as a fast way to collaborate with your associates.

### Key features:

- Ultra light weight
- 1400 lumens brightness
- Crisp XGA resolution, with auto sizing image
- DVI connection for analog and digital images
- Full-function remote control with USB mouse operation
- Computer plus composite, and S-video inputs
- Only 2.4 lbs. in a miniature package
- 1.3X zoom lens for flexible projector placement
- Audio sound from built-in speaker



### Projection throw distances for 4:3 Aspect, in inches (feet)

Image Size in inches (feet)			MIN Throw	MAX Throw
Diagonal	Width	Height		
60 (5.0)	48 (4.0)	32 (3.0)	89 (7.4)	113 (9.5)
72 (6.0)	57 (4.7)	43 (3.6)	107 (8.9)	136 (11.4)
84 (7.0)	67 (5.6)	50 (4.2)	124 (10.4)	159 (13.3)
100 (8.3)	80 (6.7)	60 (5.0)	148 (12.4)	189 (15.8)
120 (10.0)	96 (8.0)	72 (6.0)	178 (14.9)	227 (19.0)

Minimum distance to screen is 59 inches (4.9 feet)  
Image offset 110%

### Specifications

Image Element Type	0.7" DMD, DDR, Digital Micromirror Device DLP by Texas Instruments, XGA
Brightness	1400 ANSI lumens
Resolution	1024 x 768 pixels (H x V)
Contrast	1100:1
Scanning Frequency	fh 15-100 kHz, fv 43.5-130 Hz
Lens	Manual zoom 1.3X
Lens Throw Ratio	1:8 to 2.4:1 width to throw distance
Keystone Correction	Digital, +/- 15 degrees
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, SXGA
Video Compatibility	PC and Mac NTSC, PAL, SECAM, SDTV (480i), EDTV (480p)
Image Control	Freeze function, electronic magnification, pan and Picture-in-Picture
Mouse Control	Using M1 to USB
Projection Modes	Front/rear
Color Reproduction	24 bit (16.7 million)
Lamp	120W UHP
Lamp Life	3000 hours (typical)
Audio	1 speaker, 1 watt
Throw Distance	5 to 35 ft.
Screen Size	2.7 to 22.2 ft.
Inputs, Video	(1) Min DIN 4-pin, s-video (1) RCA, composite video (1) DVI, M1D/A, VESA with USB mouse (1) Audio, stereo mini jack
Inputs, Computer	Kensington lock slot
Security	32dB, ultra quiet
Fan Level	5 to 40 degrees C
Operating Temperature	AC 100-240V, 50/60 Hz, 155 watt
Power	7.8" x 2.5" x 6.1"
Size (WxHxD)	2.4 lbs.
Weight	10 lbs.
Shipping Weight	11.8" x 12.2" x 13.2"
Carton Size	Remote control, batteries, power cord, RCA video cable, DVI cable with USB, audio cable (stereo mini), and operator's manual.
Accessories Included	UL/CSA, FCC Class B
Safety	Lamp 456-241; rolling briefcase; 185-406
Optional Accessories	

### Two (2) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 12 month Peace-of-Mind Loaner Program.

# 2YR

# DUKANE

Audio Visual Products  
2900 Dukane Drive  
St. Charles, Illinois 60174  
www.dukcorp.com/av



Toll-free: 800-676-2485  
Fax: 630-584-5156  
E-mail: avsales@dukcorp.com

ImagePro is a registered trademark of Dukane Corporation

#11645-G-04