



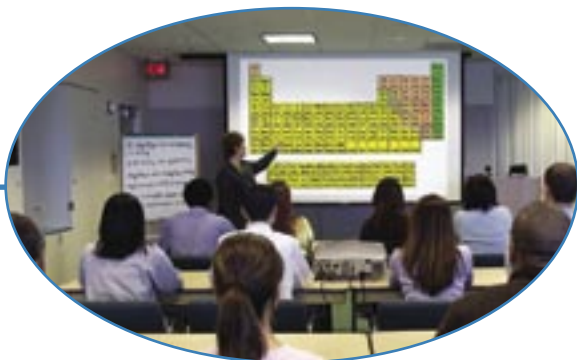

ImagePro 8755D-RJ Portable LCD Projector

- 2000 lumen brightness
- XGA resolution
- Network Capability, RJ-45
- Lamp access on top & filter access in front
- Easy to transport, only 6.7 lbs.
- Monitor loopthrough
- Remote mouse control
- HDTV ready

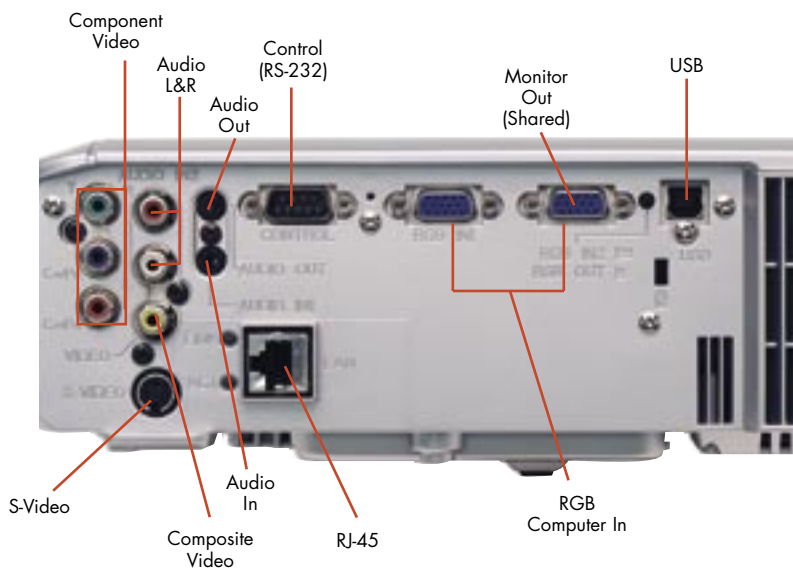

8755D-RJ DUKANE

ImagePro 8755D-RJ

Portable LCD projector

The ImagePro 8755D-RJ is a portable LCD projector that can be used in a variety of applications. With sufficient brightness for most classrooms and conference rooms the 8755D-RJ is designed to be reliable and easy to maintain.

Lamp and filter access points are conveniently located and new security options make this projector a wise multimedia investment.



Key features:

- XGA (1024 x 768) resolution
- 2000 ANSI lumens of brightness
- Network Capability, RJ-45
- Easy maintenance in ceiling mount with lamp access on top & filter access in front
- Monitor loopthrough & remote mouse control
- Individual Audio - Source Assignment
- "Instant Off" Capability
- "Custom Image" for your startup and blank screens
- "Whisper Mode" so you hear only your message
- Vertical keystone correction
- HDTV ready & progressive scan
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8755D-RJ Projection Table

| Image Size 4:3 | | Throw Distance | |
|----------------|--------|----------------|------|
| Diagonal | Width | Min. | Max. |
| Inches | Inches | Feet | Feet |
| 30 | 24 | 3.0 | 3.6 |
| 60 | 48 | 6.1 | 7.3 |
| 80 | 64 | 8.1 | 9.8 |
| 100 | 80 | 10.2 | 12.2 |
| 120 | 96 | 12.2 | 14.7 |
| 150 | 120 | 15.3 | 18.3 |
| 200 | 160 | 20.3 | 24.5 |
| 300 | 240 | 30.6 | 36.8 |

Throw Ratio (distance to width), 1.53 - 1.83

DUKANE

Dukane Corporation
 Audio Visual Products Division
 2900 Dukane Drive
 St. Charles, Illinois 60174
 Toll-free: 800-676-2485
 Fax: 630-584-5156
 avsales@dukcorp.com
 www.dukcorp.com/av



#11690-A-06

ImagePro is a registered trademark of Dukane Corporation

Specifications

| | |
|--------------------------------|---|
| Image Element | 0.6" polysilicon active-matrix TFT x3 |
| Brightness | 2000 ANSI lumens (1600 lumens in Whisper Mode) |
| Resolution | 1024 x 768 pixels (H X V), XGA |
| Contrast | 400:1 |
| Scanning Frequency | fh 15-91 kHz, fv 50-120 Hz |
| Lens | Manual zoom (F1.7 - 1.9), 1.2X |
| Lens Throw Ratio | 1.52:1 - 1.86:1 throw distance to image width |
| Keystone Correction | Digital, vertical +/-15 deg |
| Aspect Ratio | 4:3, 16:9 selectable |
| Computer Compatibility | SVGA, VGA, XGA, SXGA, UXGA Compressed PC and MAC13" and MAC16" |
| Video Compatibility | NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, HDTV (1080i, 720p, 576i, 480i/p) |
| Component Video, Image Control | Freeze function, electronic magnification and pan Using USB |
| Mouse Control | Front/rear/ceiling |
| Projection Modes | 24 bit (16.7 million) |
| Color Reproduction | 180W UHB |
| Lamp | 2000 hours (typical), 3000 hours (whisper mode) |
| Lamp Life | 1 speaker 1 watt |
| Audio | 36" to 441" |
| Throw Distance | 30" to 300" |
| Screen Size, diagonal | (1) Component, RCA x 3 (1) S-video, Mini DIN 4-pin (1) Composite video, RCA x 1 (2) RGB, 15 pin D-sub (1) Stereo mini jack (for RGB) (1) RCA x 2 (for video) |
| Inputs, Video | (1) Stereo mini jack (1) Stereo mini jack |
| Inputs, Computer | RGB, 15 pin D-sub (share with RGB2 input) |
| Inputs, Audio | RS-232, 9 pin D-sub USB Mouse control |
| Outputs, Audio | Network Connection |
| Outputs, Monitor | RJ-45 port/100 Base-T |
| Outputs, Control | Security |
| Network Connection | Kensington lock slot & Security Bar |
| Security | Fan Level |
| Fan Level | 38dB, ultra quiet 33dB in Whisper Mode |
| Operating Temperature | 32-95 deg F |
| Power | AC 100-120V, AC 220-240V 50/60 Hz, 290 watt |
| Size (WxHxD) | 12.0" x 3.4" x 9.8" |
| Weight | 6.7 lbs. |
| Shipping Weight | 16.5 lbs. |
| Carton Size | 16" x 14" x 12" |
| Accessories Included | Remote control, batteries, power cord, RGB cable, operators manual and soft carry case. |
| Safety | UL/C-UL, FCC Class B, CE |
| Optional Accessories | Lamp 456-8755D Ceiling Mount, Universal; RPA-U |

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR