




**Super Wide Angle  
Short Throw**

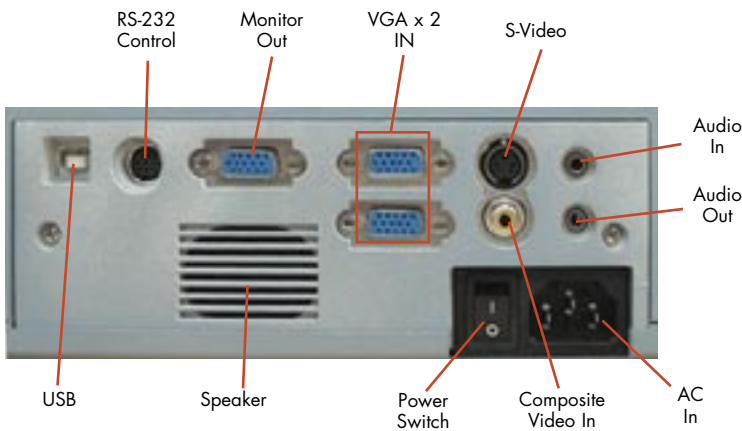

### **ImagePro 8763 Bright LCD Projector**

- 2500 Lumens Brightness
- XGA Resolution
- 500:1 Contrast Ratio
- Auto Digital Keystone Correction
- Auto Ceiling Detection
- Auto brightness adjustment
- Manual zoom & focus
- Short throw distance to the screen



**8763  
DUKANE**

# ImagePro 8763 Super Wide Angle Bright LCD projector

The Dukane ImagePro 8763 is a great projector where you may need a short throw distance when space is limited.

Superior picture quality using the newest Pixel-works™ chip to enhance flesh tones, the 8763 meets the needs for business presentation as well as education and home use. Auto ceiling detection, auto brightness and auto digital keystone correction make this one of the easiest projector to use.



## Key features:

- 2500 Lumens Brightness
- XGA Resolution
- 500:1 Contrast Ratio
- Auto Digital Keystone Correction
- Auto Ceiling Detection
- Auto brightness adjustment
- Manual zoom & focus
- Short throw distance
- Two Year Warranty and One Year Peace of Mind Service

## 8763 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	2.5	3.1
50	40	3.2	4.0
60	48	3.9	4.8
80	64	5.2	6.4
100	80	6.6	8.0
200	160	13.4	16.1
300	240	20.0	24.0

Throw Ratio (distance to width) 1.0 1.2

# DUKANE

Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 800-676-2485  
 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp.com/av



toll-free  
 fax  
 e-mail

ImagePro is a registered trademark of Dukane Corporation  
 #11738-B-07

## Specifications

Image Element	0.63" HTPS TFT x 3
Brightness	2500 ANSI lumens 2000 (whisper mode)
Resolution	1024 x 768 pixels (H x V), XGA
Contrast	500:1
Scanning Frequency	fh 15-69 kHz, fv 43-85 Hz
Lens	Manual zoom and focus, special wide angle attachment included
Lens Throw Ratio	1.0 -1.2 :1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg, automatic
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA SXGA compressed, MAC
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV 1080i, 1125i, 720p, 525p/i, 625i, 480p/i
Image Control	Freeze function, electronic magnification and pan, PIP
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	250W
Lamp Life	2000 hours (3000 in whisper mode)
Audio	1W x 2
Throw Distance	40" to 510"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1
Inputs, Computer	(2) RGB Signal: D-sub, 15 pin Audio, Stereo mini-jack x 1
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs,Control	RS232C, round DIN USB connector
Security	Kensington lock slot
Fan Level	33dB, (30dB in whisper mode)
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, at 50-60 hz, 250 watt
Size (WxHxD)	12.1" x 10.5" x 3.7"
Weight	6.8 lbs. (3.1kg)
Carton Size	20" x 14" x 17"
Shipping Weight	12 lbs.
Accessories Included	Remote control, batteries, power cord, Computer cable, Audio/Video cable, User Manual, CD ROM
Safety	UL, CUL, FCC, CE, CB, CCC, UCIC
Optional Accessories	Lamp 456-8763 Wireless Extender, LV3500W Ceiling mount , universal; RPA-U, Remote Control w/mouse function.

Specifications subject to change without notice.

Three (3) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 3YR