




## ImagePro 8775 Portable LCD Projector

- 3000 Lumens Brightness
- XGA Resolution
- 600:1 Contrast Ratio
- High Speed Wireless 802.11g (with optional LAN card)
- Integrated RJ45 Connection
- Computer-Free Presentation Capability
- PC Card Slot
- Up to 3000 hour lamp life

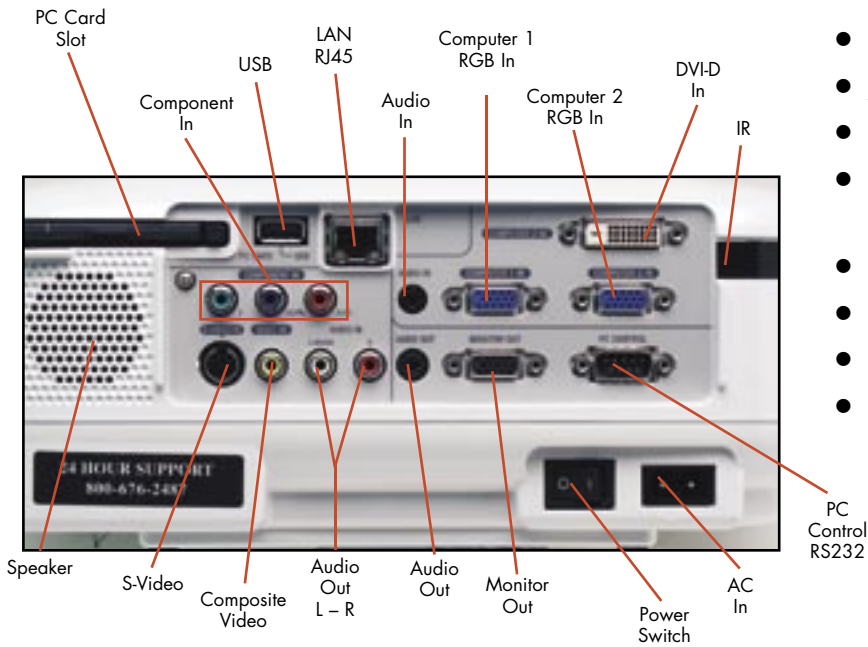

# 8775 DUKANE

# ImagePro 8775

## Portable LCD projector

The Dukane ImagePro 8775 is an outstanding LCD projector for your classroom or conference room. Powerful new features include high speed wireless network capability, computer free presentation capability, and enhanced security features.

This full-featured LCD projector is more than you're used to for less than you think.



### Key features:

- XGA (1024 x 768) resolution
- 3000 ANSI Lumens of brightness
- 600:1 Contrast Ratio
- Full function remote with mouse/cursor control and laser pointer
- Computer free presentation capability via USB
- High Speed Wireless Communication: 802.11g (requires optional LAN card)
- Integrated Wired Network Connection: RJ45
- PC Card Slot
- Three Year Warranty and One Year Peace of Mind Service

### 8775 Projection Table

Image Size 4:3		Throw Distance			
Diagonal	Width	Min.	Max.	b*	d*
Inches	Inches	Inches	Inches	Inches	Inches
30	24	33	41	6	3
40	32	45	55	9	3
60	48	69	84	13	5
80	64	93	113	17	7
100	80	117	142	22	8
120	96	141	171	26	10
150	120	176	214	32	13
200	160	236	286	43	17
240	192	284	344	52	20
300	240	356	431	65	25

b\* = Vertical distance between lens center and screen center.

d\* = Vertical distance between lens center and bottom of screen (top of screen for ceiling application).

Throw Ratio (distance to width) 1.5 1.8

# DUKANE

Dukane Corporation  
 Audio Visual Products Division  
 2900 Dukane Drive  
 St. Charles, Illinois 60174  
 800-676-2485  
 630-584-5156  
 avsales@dukcorp.com  
 www.dukcorp.com/av

toll-free  
 fax  
 e-mail



ImagePro is a registered trademark of Dukane Corporation  
 #11692-A-06

### Specifications 8775

Image Element	0.8" polysilicon TFT x 3, MLA
Brightness	3000 ANSI lumens (2200 lumens in Whisper Mode)
Resolution	1024 x 768 pixels, XGA
Contrast	600:1
Scanning Frequency	fh 15-100 kHz, fv 48-120 Hz
Lens	Manual zoom and focus (F1.7-2.0), 1.2x zoom
Lens Throw Ratio	1.5-1.8:1 throw distance to image width
Keystone Correction	Manual Automatic, vertical +/-40 deg, horizontal +/-35 deg
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	VGA, SVGA, XGA, and SXGA, SXGA+, and UXGA Compressed Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 576i/p, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB receiver to PC
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W DC
Lamp Life	2000 hours, 3000 in Whisper Mode
Audio	1W x 1
Throw Distance	28" to 354"
Screen Size	21" to 300" diagonal
Inputs, Video	RCA, composite video S-video, Min DIN 4-pin Component, YCbCr RCA, L/R audio
Inputs, Computer	RGB Signal: D-sub, 15 pin x 2 DVI-D w/ HDCP Audio, Stereo mini jack
Outputs, Monitor	15 pin, D-sub
Outputs, Audio	Audio out, Stereo mini jack (variable)
Outputs, Control	RS232
Network	RJ-45 port PC Card slot
Computer Free Presentations	USB Type A, PC Card Slot
Security	Kensington lock slot, Password Protection
Fan Level	35dB, 30dB in whisper mode
Operating Temperature	41 to 104 deg. F (5-40 deg C)
Power	AC 100-120V, AC200-240V 50/60 Hz, 292W Normal, 230W in Whisper Mode, 16W Standby, 10W Power-Save
Size (WxHxD)	11.6" x 4.7" x 11.4"
Weight	7.7 lbs.
Carton Size	16.2" x 14" x 18.3"
Shipping Weight	15.6 lbs.
Accessories Included	Remote control, RGB cable, power cord, CDROM, operators manual, soft carry case
Safety	UL/CSA, FCC Class B
Optional Accessories	Lamp 456-8767A Ceiling mount, universal; RPA-U Wireless Network Card; NWL-100A

Three (3) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year *Peace-of-Mind Loaner Program*.

# 3YR