




ImagePro 8806 Bright LCD Projector

- 3500 Lumens Brightness
- XGA Resolution
- 800:1 Contrast Ratio
- Vertical & Horizontal Lens Shift
- Full Connectivity with 3 Video and 3 Computer Inputs
- Computer Free Presentation Capability
- Wireless Capability with Optional LAN Card
- Optional Bayonet Style Lenses

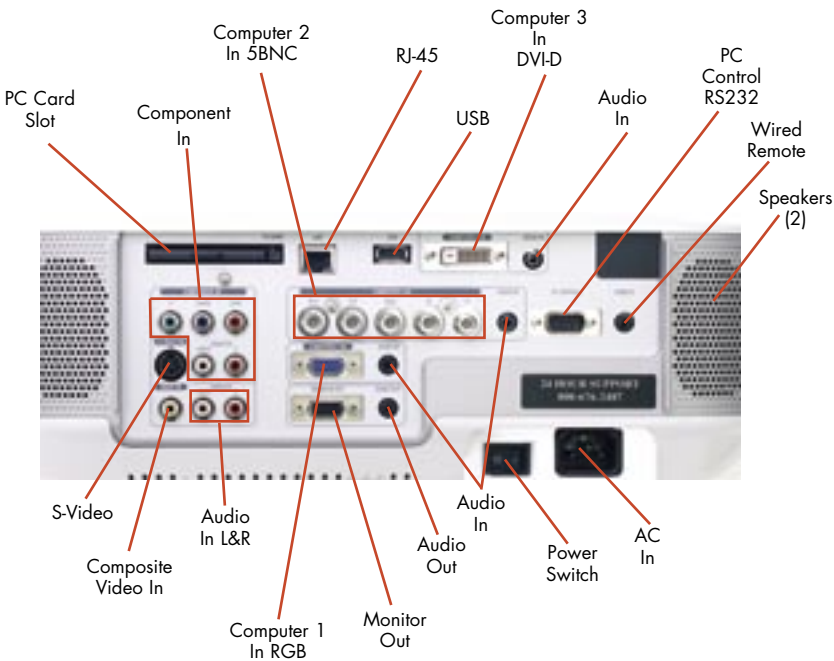


8806
DUKANE

ImagePro 8806

Super Bright LCD projector

The Dukane ImagePro 8806™ is a full featured projector that has advanced functionality including wireless capability, computer free presentation capability and enhanced video processing.

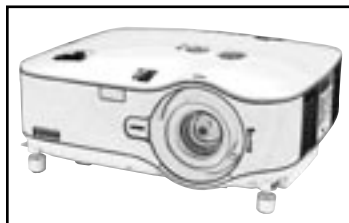

Outstanding connectivity and unique features including lens shift, 3D keystone correction, and optional lenses make this a versatile projector for any installation application.

Key features:

- 3500 Lumens Brightness
- XGA Resolution
- 800:1 Contrast Ratio
- Vertical & Horizontal Lens Shift
- Full Connectivity with 3 Video and 3 Computer Inputs
- Advanced Video Processing with Contrast Enhancement
- Lamp Saver Technologies
- Direct Power Off
- Computer Free Presentation Capability
- Wireless Capability with Optional LAN Card
- Optional Bayonet Style Lenses
- Two Year Warranty and One Year Peace of Mind Service

8806 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.9	3.9
40	32	4.0	5.3
60	48	6.0	8.1
80	64	8.1	10.8
100	80	10.1	13.5
200	160	20.4	27.2
250	200	25.6	34.1
300	240	30.7	40.9
500	400	51.4	68.4

Throw Ratio (distance to width) 1.5 2.0



Dukane Corporation
 Audio Visual Products Division
 2900 Dukane Drive
 St. Charles, Illinois 60174
 800-676-2485
 630-584-5156
 avsales@dukcorp.com
 www.dukcorp.com/av

toll-free
 fax
 e-mail



ImagePro is a registered trademark of Dukane Corporation
 #11709-F-06

Specifications 8806

Image Element	0.8" polysilicon TFT x3, MLA
Brightness	3500 ANSI lumens, 2800 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	800:1
Scanning Frequency	fh 15-100 kHz, fv 48-120 Hz
Lens	Manual focus (F=1.7 to 2.2), 1.3x Zoom
Lens Throw Ratio	1.5 -2.0 :1 throw distance to image width
Lens Shift	Manual 50% Vertical, 10% Horizontal
Keystone Correction	3D Image Square, Vertical, Horizontal, and Diagonal
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA, and SXGA+/UXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 576/50i, 480i/p
Image Control	Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	300W AC
Lamp Life	2000 hours (3000 hours whisper mode)
Audio	5W x 2
Throw Distance	30" to 822"
Screen Size, diagonal	25" to 500"
Inputs, Video	(1) Component, RCA x 3 w/ LR RCA Audio, (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1
Inputs, Computer	Audio, Stereo, RCA x 2, (1) RGB Signal: D-sub, 15 pin (1) RGBHV, 5 BNC (1) DVI-D w/ HDCP
Outputs Monitor	Audio, Stereo mini jack x 3
Outputs,Control	15 pin, D-sub Audio Out, Stereo mini jack x 1
Network	9 pin D-sub Connector, RS232 3.5mm mini jack (wired remote control)
Computer Free Presentations	RJ-45 port, 10/100 base-T PC Card Slot, 802.11b/g wireless w/ optional card
Security	USB or PCMCIA Kensington slot & Password protection
Fan Level	35dB, (30dB in whisper mode)
Operating Temperature	41 to 104 deg. F (5-40 deg C)
Power	AC 100-240V, 50/60 Hz, 435 watt
Size (WxHxD)	15.7" x 5.9" x 14.1"
Weight	16 lbs.
Carton Size	20.5" x 13.5" x 19"
Shipping Weight	27 lbs.
Accessories Included	Remote control, batteries, power cord, Remote Control Cable, RGB Cable, Lens Cap, User Manual CDROM, PC Card Lock, Lens Anti-Theft Screw
Safety	UL 1950, FCC Class B, CSA950 C-UL, NOM
Optional Accessories	Lamp 456-8806, Wireless Extender; LV3500W, Ceiling mount universal; RPA-U Wireless LAN Card; NWL-100A, Optional Short & Long Throw Lenses Available

Two (2) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

