




**ImagePro 8940
Portable LCD Projector**

- 4000 lumen brightness
- XGA resolution
- 400 to 1 contrast ratio
- Easy lamp replacement
- Powered zoom and focus
- Progressive scan
- Keystone correction and 1.5X zoom
- Picture-In-Picture

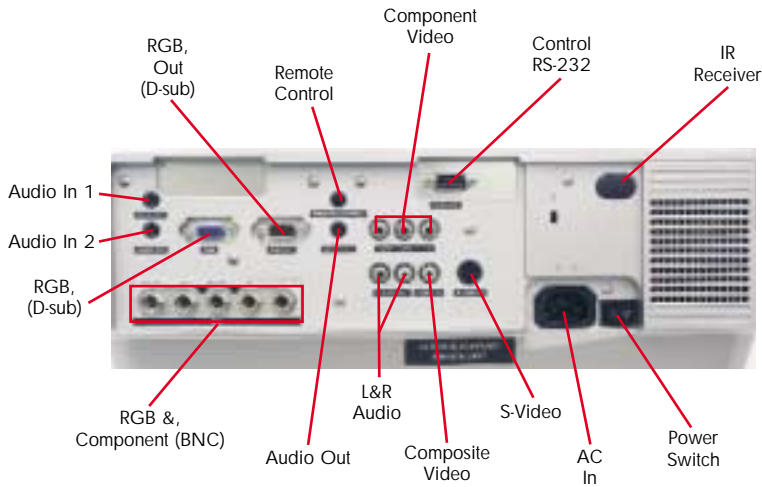

Exclusive five year warranty
the best warranty in the industry



**8940
DUKANE**

ImagePro 8940

Portable LCD projector

The Dukane ImagePro 8940™ delivers high brightness, that can be used in a wide range of places. Providing realistic colors, sharp contrast, and super bright images, the 8940 enables presentations with persuasive impact in a variety of situations.

Position the 8940 on a table, cart, or installed in a ceiling mount. The unit can be controlled by the remote control and easily adjusted even when ceiling mounted.



This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required.

Key features:

- 4000 lumen brightness
- XGA resolution
- 400 to 1 contrast ratio
- Easy lamp replacement
- Powered zoom and focus
- Progressive scan technology
- Remote control
- Digital keystone correction
- Picture-In-Picture
- Five year warranty and One year Peace-of-Mind service

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	3.8	5.9
60	48	5.9	8.9
70	56	6.9	10.5
100	80	10.0	15.1
120	96	12.0	18.1
150	120	15.1	22.7
200	160	20.3	30.3

Throw Ratio (distance to width) 1.50 2.27

DUKANE

Dukane Corporation
 Audio Visual Products Division
 2900 Dukane Drive
 St. Charles, Illinois 60174
 800-676-2485
 630-584-5156
 avsales@dukcorp.com
 www.dukcorp.com/av



toll-free
 fax
 e-mail

ImagePro is a registered trademark of Dukane Corporation
 #11678-G.-05

Specifications 8940

Image Element	0.99" polysilicon TFT x3, MLA
Brightness	4000 ANSI lumens 2300 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	400 to 1
Scanning Frequency	fh 15-91 kHz, fv 50-120 Hz
Lens	Power zoom 1.5X,
Lens Throw Ratio	1.5 -2.2:1 throw distance to image width
Keystone Correction	Digital, vertical +/-15 deg, horizontal +/- 5 deg
Aspect Ratio	4:3, 16:9, selectable
Computer Compatibility	SVGA, VGA, XGA, and SXGA/UXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 575i, 480i/p
Image Control	Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	310W UHB
Lamp Life	2000 hours
Audio	1.0 W x 2
Throw Distance	46" to 364"
Screen Size, diagonal	40" to 500"
Inputs, Video	(1) Component, RCA x 3, BNC (shared) (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 Audio, Stereo, RCA x 2,
Inputs, Computer	(1) RGB Signal: D-sub, 15 pin (1) BNC x 5 (shared), RGBHV (2) Stereo mini jack
Outputs Monitor	15 pin, D-sub Audio, Stereo mini jack x 1
Outputs, Control	9 pin D-sub Connector, RS-232 3.5mm mini jack (wired remote control)
Security	Kensington slot
Fan Level	41dB, (37dB in whisper mode)
Operating Temperature	32 to 95 deg. F (0-35 deg C)
Power	AC 100-120V, AC220-240V 50/60 Hz, 470 watt
Size (WxHxD)	16.5" x 6.3" x 12.5"
Weight	15.2 lbs.
Carton Size	20.5" x 13.5" x 19"
Shipping Weight	27 lbs.
Accessories Included	Remote control, batteries, power cord, RGB Cable, Video/Audio Cable, and operator/safety manual.
Safety	UL/CSA, FCC/DOC Class B, CE
Optional Accessories	Lamp 456-8942

Five (5) year limited warranty on parts and labor in North America,
 lamp excluded (for other locations, local warranties apply). Includes
 Dukane's FREE 1 year *Peace-of-Mind Loaner Program*.

5YR