





ImagePro 8944 LCD Projector

- 4000 lumen brightness
- XGA resolution & HDTV Ready
- Wireless 802.11 b/g operation
- Network capability, RJ-45
- Computer-less presentation with SD card slot and USB type A
- Lamp access on top & high performance filter on side
- Horizontal & vertical lens shift
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology

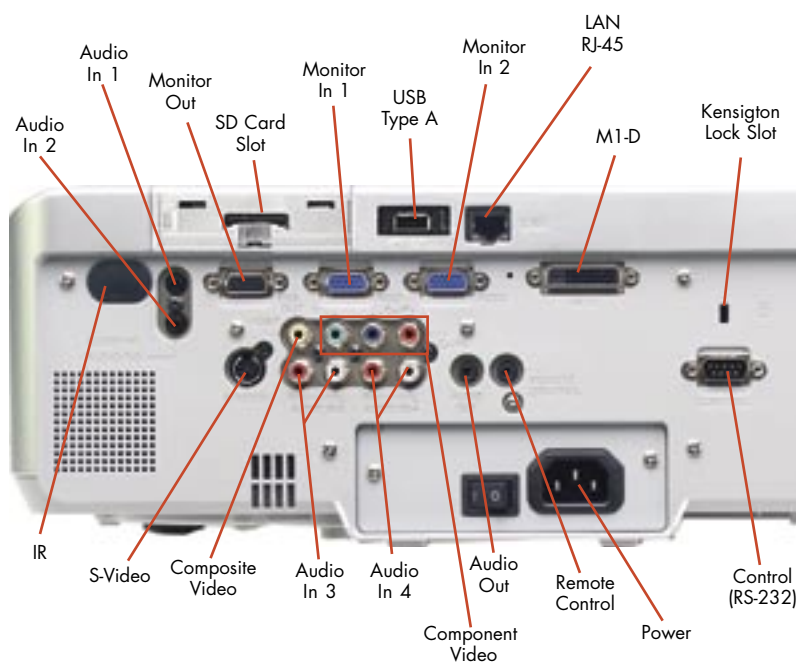

Manual Horizontal & Vertical Lens Shift

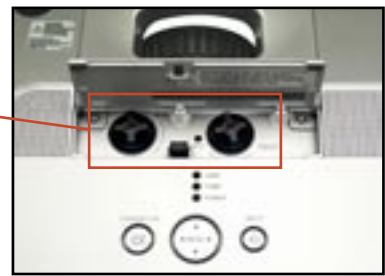

8944 DUKANE

ImagePro 8944

LCD projector

The ImagePro 8944 is a LCD projector that can be used in a variety of applications. With sufficient brightness for most classrooms and conference rooms the 8944 is designed to be reliable and easy to maintain.

Computer-less presentations using your SD Card or USB Flash Drive. Wireless operation using 802.11 b/g via an SD receiver. Can connect to 4 PC's wirelessly. Lamp and filter access points are conveniently located and Kensington™ lock slot and our new security bar makes this projector secure and a wise multimedia investment.



Key features:

- XGA (1024 x 768) resolution
- 4000 ANSI lumens of brightness
- Wireless 802.11 b/g operation
- Network Capability, RJ-45
- Computer-less presentation with SD card slot and USB type A
- Whiteboard & Blackboard Modes
- Easy maintenance in ceiling mount with lamp access on top & filter access on side
- Monitor loopthrough & remote mouse control
- Remote control with "My Buttons"
- Optional bayonet style lenses available
- 4 Built-in 4W speakers with SRS WOW™ technology
- Input source naming
- Horizontal & vertical lens shift
- HDTV ready & progressive scan
- Kensington lock slot & security bar
- Five Year Warranty and One Year Peace of Mind Service

8944 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	2.8	3.4
60	48	5.8	7.0
80	64	7.8	9.3
100	80	9.8	11.7
120	96	11.7	14.1
150	120	14.7	17.6
200	160	19.5	23.5
300	240	29.3	35.3

Throw Ratio (distance to width), 1.46 1.75

DUKANE

Dukane Corporation
 Audio Visual Products Division
 2900 Dukane Drive
 St. Charles, Illinois 60174
 Toll-free: 800-676-2485
 Fax: 630-584-5156
 avsales@dukcorp.com
 www.dukcorp.com/av



#11730-A-07

ImagePro is a registered trademark of Dukane Corporation

Specifications

Image Element
 Brightness
 Resolution
 Contrast
 Scanning Frequency
 Lens
 Lens Throw Ratio
 Keystone Correction
 Aspect Ratio
 Computer
 Compatibility
 Video Compatibility
 Image Control
 Mouse Control
 Projection Modes
 Color Reproduction
 Lamp
 Lamp Life
 Audio
 Throw Distance
 Screen Size, diagonal
 Inputs, Video
 Inputs, Computer
 Outputs Monitor
 Outputs Audio
 Outputs,Control
 Network
 Other
 Security
 Wireless
 Fan Level
 Operating Temperature
 Power
 Size (WxHxD)
 Weight
 Carton Size
 Shipping Weight
 Accessories Included
 Safety
 Optional Accessories
 Optional Lenses

8944

0.8" polysilicon TFT x3
 4000 ANSI lumens, 2300 (whisper mode)
 1024 x 768 pixels (H X V), XGA
 1000:1
 fh 15-106 kHz, fv 50-120 Hz
 Manual zoom (F=1.7 to 2.1), 1.2X.
 Horizontal & vertical lens shift
 1.5-1.8 :1 throw distance to image width
 Digital vertical & horizontal +/-40 deg.
 4:3 native, 16:9 selectable
 VGA, SVGA, XGA, SXGA, SXGA+ and
 UXGA Compressed, MAC13", MAC16"
 NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SE-
 CAM, HDTV 1080i, 720p, 576i, 480i/p
 Freeze function, electronic magnification
 and pan
 Using MI
 Front/rear/ceiling
 24 bit (16.7 million)
 285W UHB
 2000 hours (3000 hours Whisper Mode)
 4W x 4
 35" to 436"
 30" to 300"
 (1) Component, RCA x 3
 (1) S-video, Min DIN 4-pin,
 (1) Composite video, RCA x 1
 Audio, Stereo, RCA x 2, (L/R)
 (2) RGB Signal: D-sub, 15 pin,
 (1) M1-D, Audio, Stereo mini jack x 2
 15 pin, D-sub
 Audio, Stereo mini jack x 1
 9 pin D-sub Connector, RS232, M-1 (for
 USB remote mouse only) 3.5mm mini
 stereo jack (wired remote)
 RJ-45 port / 100Base-T
 SD Card, USB 2.0 Memory
 Kensington slot, Security bar
 802.11 b/g with SD card
 35dB, (28dB in whisper mode)
 41 to 95 deg. F (5-35 deg C)
 AC 100-120V, AC220-240V
 50/60 Hz, 460 watt
 16.5" x 5.5" x 12.6"
 15.6 lbs.
 21" x 14" x 19"
 25 lbs.
 Remote control, batteries (AA), power
 cord, RGB cable, security cable,
 operator/safety manual.
 UL60950, C-UL, FCC Part15,
 Class B, CE, EN60950
 Lamp 456-8943, Ceiling mount,
 universal; RPA-U
 FL-601 Short fixed, throw Ratio 0.8
 SL-602 Short 1.7X zoom, throw ratio 1.2 to 2.0
 LL-603 Long 2.0X zoom, throw ratio 1.9 to 3.9
 UL-604 Long 1.8X zoom, throw ratio 3.9 to 7.4

Five (5) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.

5YR