




A-key to better communications.

EIP-200

SVGA Ultraportable DLP™ Projector

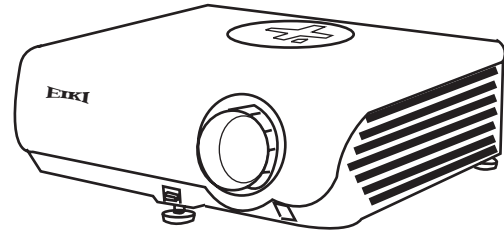

EIP-200

KEY FEATURES: Model EIP-200

- 2000 ANSI Lumens, 85% uniformity, and 2000:1 contrast ratio.
- DLP™ imaging technology delivers a "seamless" high contrast image.
- True SVGA resolution. SXGA+, SXGA, SVGA, VGA & compatible.
- Smart data compression / expansion, and video scaling.
- Convenient manual zoom and focus lens.
- Preset image offset. Vertical digital keystone correction.
- Settings for Standard, Presentation, Movie, Game, and sRGB operation.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- Supports most HDTV resolutions.
- System Lock function. Keylock function.
- Menu Driven Help System. Power Management function.
- Wireless remote control.
- 3 Year* Projector Warranty!

Included Accessories: Owner's manual. Quick guide. AC Power Cord. Lens Cover. VGA-type Computer Input Cable (HD15~HD15).
Wireless Remote Control and Batteries (2 x AA). Component Video Input Cable (HD15~3-RCA).
RS-232 Control Adapter (DB9~9-pin DIN).

Optional Accessories: Replacement Lamp. Ceiling Mount. Ceiling Post and Plate. EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model EIP-200

Screen Brightness	Standard, 2,000 / Eco 1,740 ANSI Lumens	Video: Resolutions Supported	
Illumination Uniformity	85%	SDTV	480i, 540p, 576i
Size of Color Palette	16.7 Million	EDTV	480p, 576p
Contrast Ratio	2000:1 (Full ON/OFF)	HDTV	720p (50/60), 1035i (50/60), 1080i (50/60)
Horizontal Resolution	520 TV Lines (DTV 720p)	Signal Inputs:	
Projection Lamp	275 Watt VIP	1. Computer / Component (with breakout cable)	HD15 x 1
Estimated Lamp Life	Standard, 2,000 / Eco 3,000 Hours of Use	2. Computer / Component (with breakout cable)	HD15 x 1
Imaging System	0.55 in. DDR SVGA DMD™	plus Audio shared - inputs 1 & 2	Stereo: MiniStereo x 1
Color System	4-Segment, 3X speed color wheel	3. S-Video	S-Video x 1
Screen Pixels	(800 x 600) in stripe configuration	4. Composite	RCA x 1
Total Pixels	480,000	plus Audio shared - inputs 3 & 4	Stereo: RCA x 2 (L&R)
Lens Type	Manual Zoom and Focus	Signal Outputs:	
Lens Specs	Speed: f:2.4~2.6; FL: 0.75~0.86in. (19~21.9 mm)	Computer / Component shared between input 1 & 2	HD15 x 1
Lens Ratios	Zoom Range: 1.15:1; Throw:Width: 1.72~1.99:1	plus Audio shared - inputs 1 & 2	Stereo: MiniStereo x 1(variable)
Image Diagonal	40~300 in. (102~762 cm)	Audio: Amplifier	Mono:2 Watt
Image Width	2.67~20 ft. (0.81~6.1m.)	Audio: Built In Speakers	1.6 x 1.1 in. (4 x 2.85 cm) oval x 1
Throw Distance	4.6~39.8 ft. (1.4~12.2 m.)	Operating Noise	33 dBA Standard / 30 dBA in Eco mode
Front Elevation / Maximum Tilt	up to 8° up	Cabinet Size (HxWxD)	4.3 x 12.4 x 11.6 in. (120 x 315 x 295 mm.)
Anti Keystone	Fixed Image Offset 110.5% of Image Height, up	Weight	8.6 lbs. (3.9 kg)
Vertical Keystone Correction	Digital: up-to 13° up or down	Packaged Size	10.7 x 17.4 x 18.1 in. (272 x 441 x 459 mm)
Scanning Frequency	Auto: H Sync. 15-70 kHz; V Sync. 45-85 Hz	Packaged Weight	16.3 lbs. (7.4 kg)
Dot Clock	12~108 MHz	Power Requirements	100-240V AC, 50/60Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption / Heat	350 W / 922 BTU/hr / (233 Kcal/hr)
Local Control / Power Management	Full Function / Auto Shut-Off	Power Consumption / Heat - Eco	196 W / 669 BTU/hr / (169 Kcal/hr)
Remote Projector Control	Wireless (Infra Red) x 1	Power Cord	6' (1.8M) Type 3, Detachable
RS-232 Control Port	Mini DIN 9 Pin x 1	Safety Compliance	UL / cUL Listed
Computer Native Resolution	800 x 600 (SVGA)	Security Facilities	Kensington® Security Slot
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA, VGA & MAC 13 ~ 21	Operating Temperature	41~95°F (5~35°C)
Computer: Formats	1400x1050 through 640 x 480	User Maintenance	Clean Air Intake, Replace Lamp
Computer: Image Sizing	Normal, or Smart Compressed or Expanded	Warranty: Projector	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Video: Color Systems	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata * Whichever occurs first)
Video: Aspect Ratios Supported	4:3 and 16:9		
Video: Image Sizing	Video Scaling Technology		

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2005 Eiki International, Inc. Issued September 12, 2005.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>