




A-key to better communications.

EIP-2500

XGA Ultraportable DLP™ Projector

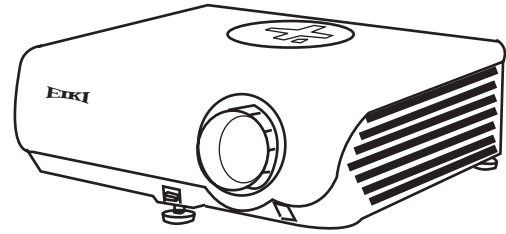

EIP-2500

KEY FEATURES: Model EIP-2500

- 2500 ANSI Lumens, 85% uniformity, and 2000:1 contrast ratio.
- DLP™ imaging technology delivers a "seamless" high contrast image.
- True XGA resolution. SXGA+, SXGA, SVGA, VGA & MAC compatible.
- Smart data compression / expansion, and video scaling.
- Convenient manual zoom and focus lens.
- Preset image offset. Vertical digital keystone correction.
- Settings for Standard, Presentation, Movie, Game, and sRGB operation.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- Supports most HDTV resolutions.
- Sealed Optics. No air filter to maintain.
- Extremely quiet: operating noise only 30 dBA in eco mode.
- System Lock function. Keylock function.
- Menu Driven Help System. Power Management function.
- Wireless remote control.
- 3 Year* Projector Warranty!

Included Accessories: Owner's manual. Quick guide. AC Power Cord. Lens Cover. VGA-type Computer Input Cable (HD15~HD15).
Wireless Remote Control and Batteries (2 x AA). Component Video Input Cable (HD15~3-RCA). RS-232 Control Adapter (DB9~9-pin DIN).

Optional Accessories: Replacement Lamp. Ceiling Mount. Ceiling Post and Plate. ATA-Style shipping case with Wheels & Telescoping Handle.
EZ-250 Local Control. NPC-1 Network Control.

SPECIFICATIONS: Model EIP-2500

Screen Brightness	Standard, 2,500 / Eco 2,150 ANSI Lumens	Video: Resolutions Supported	480i, 540p, 576i
Illumination Uniformity	85%	SDTV	480p, 576p
Size of Color Palette	16.7 Million	EDTV	720p (50/60), 1035i (50/60), 1080i (50/60)
Contrast Ratio	2000:1 (Full ON/OFF)	Signal Inputs:	
Horizontal Resolution	600 TV Lines (DTV 720p)	1. Computer / Component (with breakout cable)	HD15 x 1
Projection Lamp	275 Watt VIP	2. Computer / Component (with breakout cable)	HD15 x 1
Estimated Lamp Life	Standard, 2,000 / Eco 3,000 Hours of Use	plus Audio shared - inputs 1 & 2	Stereo: MiniStereo x 1
Imaging System	0.55 in. DDR XGA DMD™	3. S-Video	S-Video x 1
Color System	4-Segment, 3X speed color wheel	4. Composite	RCA x 1
Screen Pixels	(1024x768) in stripe configuration	plus Audio shared - inputs 3 & 4	Stereo: RCA x 2 (L&R)
Total Pixels	786,432	Signal Outputs:	
Lens Type	Manual Zoom and Focus	Computer / Component shared between input 1 & 2	HD15 x 1
Lens Specs	Speed: f:2.4~2.6; FL: .0.75~0.86in. (19~21.9 mm)	plus Audio shared - inputs 1 & 2	Stereo: MiniStereo x 1 (variable)
Lens Ratios	Zoom Range: 1.15:1; Throw:Width: 1.72~1.99:1	Audio: Amplifier	Mono:2 Watt
Image Diagonal	40~300 in. (102~762 cm)	Audio: Built In Speakers	1.6 x 1.1 in. (4 x 2.85 cm) oval x 1
Image Width	2.67~20 ft. (0.81~6.1m.)	Operating Noise	33 dBA Standard / 30 dBA in Eco mode
Throw Distance	4.6~39.8 ft. (1.4~12.2 m.)	Cabinet Size (HxWxD)	4.3 x 12.4 x 11.0 in. (109 x 315 x 280 mm.)
Front Elevation / Maximum Tilt	up to 8° up	Overall Size (HxWxD)	4.7 x 12.4 x 11.6 in. (120 x 315 x 295 mm.)
Anti Keystone	Fixed Image Offset 110.5% of Image Height, up	Weight	8.6 lbs. (3.9 kg)
Vertical Keystone Correction	Digital: up-to 13° up or down	Packaged Size	10.7 x 17.4 x 18.1 in. (272 x 441 x 459 mm)
Scanning Frequency	Auto: H Sync. 15-70 kHz; V Sync. 45-85 Hz	Packaged Weight	16.3 lbs. (7.4 kg)
Dot Clock	12~108 MHz	Power Requirements	100-240V AC, 50/60Hz
Image Orientation	Normal, Reversed, Inverted	Power Consumption / Heat	350 W / 922 BTU/hr / (233 Kcal/hr)
Local Control / Power Management	Full Function / Auto Shut-Off	Power Consumption / Heat - Eco	196 W / 669 BTU/hr / (169 Kcal/hr)
Remote Projector Control	Wireless (Infra Red) x 1	Power Cord	6' (1.8M) Type 3, Detachable
RS-232 Control Port	Mini DIN 9 Pin x 1	Safety Compliance	UL / cUL Listed
Computer Native Resolution	1024 x 768 (XGA)	Security Facilities	Kensington® Security Slot
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA, VGA & MAC 13 ~ 21	Operating Temperature	41~95°F (5~35°C)
Computer: Formats	1400x1050 through 640 x 480	User Maintenance	Clean Air Intake, Replace Lamp
Computer: Image Sizing	Normal, or Smart Compressed or Expanded	Warranty: Projector	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Video: Color Systems	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata * Whichever occurs first)
Video: Aspect Ratios Supported	4:3 and 16:9		
Video: Image Sizing	Video Scaling Technology		

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2005 Eiki International, Inc. Issued September 12, 2005.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com
In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>