

ddv 2500

Convincing high-brightness pictures

Liesegang

projection technology



ddv 2500 – Office projector for highest demands

Convincing in brightness, contrast and functionality: With the Liesegang **ddv 2500** you get the ideal projector for your successful presentation. With XGA resolution, DLP™ technology, 2500 ANSI lumens image brightness and a contrast ratio of 1500:1 you will be the focus. The **ddv 2500** is suitable for medium-sized to large conference- and meeting rooms and even under daylight conditions you can be sure of clear and bright images. Besides extensive equipment of presentation tools and interfaces, the **ddv 2500** is having an Ethernet-interface which enables a controlling of all functions through the internet browser. Latest technology will convince you.



- Ethernet interface for the control of all projector functions
- XGA resolution
- 2500 ANSI lumens image brightness
- extensive equipment of presentation tools and interfaces



ddv 2500




ddv 2500

Convincing high-brightness pictures

Liesegang

projection technology

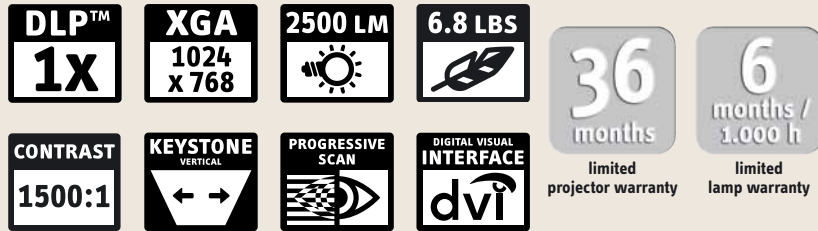

- Network-connector on-board
- Whisper mode for low-noise operation
- Contrast 1500:1
- Input for Component-Video
- Integrated presentation tools: Digital Zoom, Picture-in-Picture, Freeze frame
- Optimized video playback by integrated De-Interlacer (Progressive Scan)
- IR remote control with mouse function and laser pointer
- Electronic image reversal for back projection and ceiling mount projection



Liesegang ddv 2500

1200 031D 0000

including power cord, connecting cable,
remote control, user manual, soft case, lens-cap
EAN 4044714200307

Accessories

- | | |
|----------------------------------|-----------------|
| 250 W Spare lamp | ZU 1200 04 4010 |
| Ceiling mounting / carrier plate | ZU 1200 75 0005 |
| Ceiling mounting / column CM 25 | ZU 0260 75 0006 |
| Anti-theft key lock | ZU 0266 78 0000 |
| Anti-theft combination lock | ZU 0061 78 0000 |

Technical Specifications*	ddv 2500
Technology	1x 0.7" DLP™
Native resolution	XGA, 1024 x 768 pixel
Supported resolution	up to SXGA
Video compatibility	PAL, SECAM, NTSC, HDTV
Contrast ratio	1500:1
Brightness Standard Mode	2500 ANSI lumens
Brightness Whisper Mode	2000 ANSI lumens
Lamp, Lifetime**	250 W VIP, 2000 h
Mains voltage	100–240 VAC / 50–60 Hz
Power consumption	340 W / < 10 W stand-by
Dimensions (W x H x D)	285 x 86 x 220 mm (11.2" x 3.4" x 8.7")
Weight	3.1 kg (6.8 lbs)
Keystone correction	± 15° vert.
Scanning frequency hor. / vert.	15,30–90 kHz / 50–85 Hz
Pixel clock	110 MHz
Image uniformity	> 80 %
Speaker	1 x 3 W
Projection lens	F = 2.4, f = 25.0–30.0 mm 1.2 x manual zoom
Digital zoom	16 x
Projection distance	1.5–10.0 m
Screen size (diagonal)	0.90–7.20 m (30"–300")
Throw ratio	1.73–2.1
Noise level	34 dB Standard Mode 30 dB Whisper Mode
Connectors	
Computer in	1 x RGB analog (D-Sub HD) 1 x DVI-I
Monitor out	1 x USB
Control	1 x RS-232 (PS/2) 1 x Ethernet (RJ45)
Monitor out	1 x RGB analog (D-Sub HD)
Video in	1 x Video (RCA) 1 x S-Video (Mini-DIN) 1 x Component (DVI-I)
Audio in	1 x Audio Stereo (Mini jack)
Audio out	1 x Audio Stereo (Mini jack)
Approvals	CE, FCC B, UL, TÜV
Miscellaneous specifications	• Automatic signal detection • Multilingual on-screen menu • Suitable for 4:3 and 16:9 aspect ratio • Kensington Lock™ slot

* Subject to modification, ** average life time

Distance in m (inch)	Image size in m (inch)		Image diagonal in m (inch)	
	from	to	from	to
1.5 (59.1")	0.71 (28.12")	0.87 (34.14")	0.89 (35.15")	1.08 (42.67")
2.0 (78.7")	0.95 (37.50")	1.16 (45.51")	1.19 (46.87")	1.45 (56.89")
2.5 (98.4")	1.19 (46.87")	1.45 (56.89")	1.49 (58.59")	1.81 (71.12")
3.0 (118.1")	1.43 (56.24")	1.73 (68.27")	1.79 (70.30")	2.17 (85.34")
5.0 (196.9")	2.38 (93.74")	2.89 (113.79")	2.98 (117.17")	3.61 (142.23")
7.0 (275.6")	3.33 (131.23")	4.05 (159.30")	4.17 (164.04")	5.06 (199.13")

Your Liesegang specialist dealer

Liesegang Optoelectronics GmbH
Kaistrasse 5
40221 Duesseldorf
Germany
phone +49 (0) 2 11/39 01-1
fax +49 (0) 2 11/39 01-227
www.liesegang.com
info@liesegang.com

Liesegang Corp.
1001 W. Cypress Creek Rd. 103
Ft. Lauderdale, FL 33309
USA
phone (954) 489 23 01
fax (954) 489 23 18
www.liesegangcorp.com
info@liesegangcorp.com