

# dv 410

The compact XGA projector

# Liesegang

projection technology



## dv 410 – Bright and compact.

Power and functionality in a compact shell: when it comes to sharp and detailed presentations, the **dv 410**, equipped with a brightness of 2500 ANSI lumens and brilliant XGA resolution, becomes your first option. With a large variety of ports for two computers, multiple video-ins and one separate Monitor-Out, the multimedia projector **dv 410** is outstanding equipped. Suited for medium- to large-sized conference rooms. The latest generation of LCD-panels stands for highest-quality-imaging.



- XGA resolution
- 2500 ANSI lumens  
image brightness
- Excellent equipment
- Horizontal and vertical  
Keystone Correction
- Whisper Mode

# dv 410




# dv 410

The compact XGA projector

# Liesegang

projection technology

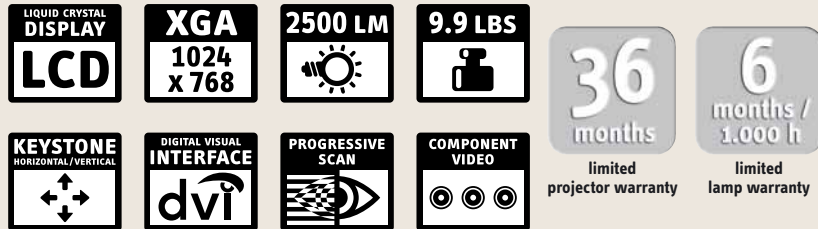

- HDTV compatible
- Integrated presentation tools: Digital Zoom, Picture-in-Picture, Freeze frame
- Horizontal and vertical Keystone Correction
- 2 RGB-Inputs, separate Monitor-Output
- DVI-Input
- Component-Input
- Integrated De-Interlacer for Progressive Scan
- Electronic image reversal for back projection and projection from the ceiling



## Liesegang dv 410

0217 047C 0000

including power cord, connecting cables, user manual, remote control, software  
EAN 4044714217015

## Accessories

- 250 W Spare lamp ZU 0288 04 4010
- Ceiling mounting /carrier plate ZU 0288 75 0005
- Ceiling mounting / column CM 50 ZU 0260 75 0007
- Anti-theft key lock ZU 0266 78 0000
- Anti-theft combination lock ZU 0061 78 0000

Technical Specifications*	dv 410
Technology	3 x 0.9" LCD
Native resolution	XGA, 1024 x 768 pixel
Supported resolution	up to SXGA
Video compatibility	PAL, SECAM, NTSC, HDTV
Contrast ratio	400 : 1
Brightness Standard Mode	2500 ANSI lumens
Brightness Whisper Mode	2000 ANSI lumens
Lamp, Lifetime**	250 W UHB, 2000 h
Mains voltage	100–120 VAC / 220–240 VAC, 50–60 Hz
Power consumption	410 W / < 10 W stand-by
Dimensions (W x H x D)	360 x 106 x 257 mm (14.2" x 4.2" x 10.1")
Weight	4.5 kg (9.9 lbs)
Keystone correction	± 5° hor. / ± 15° vert.
Scanning frequency hor. / vert.	15–80 kHz / 50–120 Hz
Pixel clock	120 MHz
Image uniformity	> 85 %
Speaker	2 x 1 W
Projection lens	F = 1.74–2.08, f = 36.8–47.8 mm
	1.3 x manual zoom
Digital zoom	4 x
Projection distance	1.2–15.7 m
Screen size (diagonal)	0.77–7.70 m (30"–300")
Throw ratio	1.94–2.57
Noise level	39 dB Standard Mode 33 dB Whisper Mode
<b>Connectors</b>	
Computer in	2 x RGB analog (D-Sub HD) 1 x DVI-D
Mouse	1 x USB
Control	1 x RS-232
Video in	1 x RGB analog (D-Sub HD) 1 x Video (RCA) 1 x S-Video (Mini-DIN) 1 x Component (RCA)
Audio in	1 x Audio Stereo (RCA) 2 x Audio Stereo (Mini jack)
Audio out	1 x Audio Stereo (RCA)
Approvals	CE, FCC B, UL, TÜV
<b>Miscellaneous specifications</b>	• Automatic signal detection • Multilingual on-screen menu • Suitable for 4 : 3 and 16 : 9 aspect ratio • Kensington Lock™ slot

\* Subject to modification, \*\* average life time

Distance in m (inch)	Image size in m (inch)				Image diagonal in m (inch)			
	from	to	from	to	from	to	from	to
1.5 (59.1")	0.58 (22.98")	0.77 (30.44")	0.73 (28.72")	0.97 (38.05")				
2.0 (78.7")	0.78 (30.64")	1.03 (40.59")	0.97 (38.30")	1.29 (50.73")				
2.5 (98.4")	0.97 (38.30")	1.29 (50.73")	1.22 (47.87")	1.61 (63.42")				
3.0 (118.1")	1.17 (45.96")	1.55 (60.88")	1.49 (57.45")	1.93 (76.10")				
5.0 (196.9")	1.95 (76.60")	2.58 (101.47")	2.43 (95.74")	3.22 (126.84")				
7.0 (275.6")	2.72 (107.23")	3.61 (142.06")	3.40 (134.04")	4.51 (177.57")				

Your Liesegang specialist dealer

Liesegang Optoelectronics GmbH  
Kaistrasse 5  
40221 Duesseldorf  
Germany  
phone +49 (0) 211/39 01-1  
fax +49 (0) 211/39 01-227  
www.liesegang.com  
info@liesegang.com

Liesegang Corp.  
1001 W. Cypress Creek Rd. 103  
Ft. Lauderdale, FL 33309  
USA  
phone (954) 489 23 01  
fax (954) 489 23 18  
www.liesegangcorp.com  
info@liesegangcorp.com