

Multi 800

All-round-talent

Liesegang

projection technology



Multi 800 – Multi-tasking at its best.

The **Multi 800** is Liesegang's all-round-talent. Its integrated DVD player and memory card reader not only saves space in your living- or classroom, it also convinces by its brilliant 1800 ANSI lumens and a contrast of 2200:1. Beyond that, its latest DLP™ technology enables very natural colour display and astonishing black levels. The internal storage card reader sends the data, e.g. from a digital camera, directly to projection.

Multi 800: The compact all-in-one solution for ambitious presenters.



- Integrated DVD player
- Integrated memory card reader
- Contrast ratio 2200:1
- Cordless stereo active speaker-system
- DLP™ technology



Multi 800




Multi 800

All-round-talent

Liesegang

projection technology

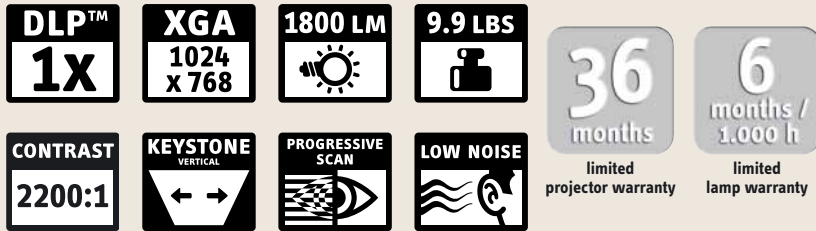

- Integrated DVD player and memory card reader
- High contrast ratio 2200:1
- Whisper Mode for low-noise operation
- Active speaker-system (cordless, stereo)
- Keystone Correction
- Input for Component Video
- All-in-one-remote control
- Integrated De-Interlacer for Progressive Scan
- Supports all current DVD standards
- Supports all current card formats



Liesegang Multi 800

1202 032D 0000

including power cord, connection cables, active speaker-system (cordless, stereo), user manual, remote control

EAN 4044714202301

Accessories

250 W Spare lamp

ZU 1202 04 4010

Anti-theft key lock

ZU 0266 78 0000

Anti-theft combination lock

ZU 0061 78 0000

Technical Specifications*	Multi 800
Technology	1x 0.7" DLP™
Native resolution	XGA, 1024 x 768 pixel
Supported resolution	up to SXGA
Video compatibility	PAL, SECAM, NTSC, HDTV
Contrast ratio	2200:1
Brightness Standard Mode	1800 ANSI lumens
Brightness Whisper Mode	1440 ANSI lumens
Lamp, Lifetime**	250 W VIP, 2000 h ¹
Mains voltage	100–240 VAC / 50–60 Hz
Power consumption	330 W / < 10 W stand-by
Dimensions (W x H x D)	380 x 105 x 300 mm (15.0" x 4.1" x 11.8")
Weight	4.5 kg (9.9 lbs)
Keystone correction	± 12° vert.
Scanning frequency hor. / vert.	15–82 kHz / 50–85 Hz
Pixel clock	100 MHz
Image uniformity	> 80 %
Speaker	1 x 2 W
Projection lens	F = 2.8–3.1, f = 25.8–30.0 mm
	1.2 x manual zoom
Digital zoom	4 x
Projection distance	1.5–10.0 m
Screen size (diagonal)	0.90–7.60 m (30"–300")
Throw ratio	1.8–2.1
Noise level	32 dB Standard Mode
	30 dB Whisper Mode
Connectors	
Computer in	1 x RGB analog (D-Sub HD)
Monitor out	1 x RGB analog (D-Sub HD)
Video in	1 x Video (RCA)
	1 x S-Video (Mini-DIN)
	1 x Component (RCA)
Audio in	1 x Audio Stereo (RCA)
	1 x Audio Stereo (Mini jack)
Audio out	1 x Surround 5.1 (Mini jack)
	1 x Stereo Front (Mini jack)
	1 x Stereo Rear (Mini jack)
	1 x Center (Mini jack)
Approvals	CE, FCC B, UL, TÜV
Miscellaneous specifications	<ul style="list-style-type: none"> • Automatic signal detection • Multilingual on-screen menu • Suitable for 4:3 and 16:9 aspect ratio • Kensington Lock™ slot

* Subject to modification, ** average life time

¹ up to 3500 h in Whisper Mode

Distance in m (inch)	Image size in m (inch)		Image diagonal in m (inch)	
	from	to	from	to
1.5 (59.1")	0.71 (28.12")	0.83 (32.81")	0.89 (35.15")	1.04 (41.01")
2.0 (78.7")	0.95 (37.50")	1.11 (43.74")	1.19 (46.87")	1.39 (54.68")
2.5 (98.4")	1.19 (46.87")	1.39 (54.68")	1.49 (58.59")	1.74 (68.35")
3.0 (118.1")	1.43 (56.24")	1.67 (65.62")	1.79 (70.30")	2.08 (82.02")
5.0 (196.9")	2.38 (93.74")	2.78 (109.36")	2.98 (117.17")	3.47 (136.70")
7.0 (275.6")	3.33 (131.23")	3.89 (153.11")	4.17 (164.04")	4.68 (191.38")

Your Liesegang specialist dealer

Liesegang Optoelectronics GmbH

Kaistrasse 5
40221 Duesseldorf
Germany

phone +49 (0) 211/39 01-1
fax +49 (0) 211/39 01-227
www.liesegang.com
info@liesegang.com

Liesegang Corp.

1001 W. Cypress Creek Rd. 103
Ft. Lauderdale, FL 33309
USA

phone (954) 489 23 01
fax (954) 489 23 18
www.liesegangcorp.com
info@liesegangcorp.com