



Small, Lightweight Micro Portable size for the Road-warrior Presenter!

The Mitsubishi XD90U is a DLP® projector that offers high XGA resolution, a bright 1500 ANSI lumens and a rich 2000:1 contrast ratio in a package small enough to go almost anywhere you need it to go.

Highly mobile presenters, road-warriors and trainers will enjoy the convenience of its small compact and lightweight design for quick and easy portability. They will also enjoy Auto keystone for a perfect square image and the simplicity of a sliding lens cover that protects without the hassle of being misplaced. In addition, menu controls are back-lit for easy access even in darker environments, and its quick cool down system really helps the presenter be on the go.

The XD90U comes with the peace of mind knowing that it is covered with a three-years parts and labor warranty, a lamp life rating of up to 3000-hours*, and Mitsubishi's award-winning Express Replacement Assistance (ERA) warranty. Built with the high quality standards you have come to expect from Mitsubishi projectors, the XD90U is a smart investment for the presenter on the go.

**low mode rating*

- Native XGA resolution, SXGA Maximum resolution
- DLP® Technology for long lasting image performance
- Bright 1500 ANSI lumens and rich 2000:1 Contrast Ratio
- Compact and lightweight state-of-the-art design
- Optics by Carl Zeiss, a known leader in optic technology
- Convenient sliding lens cover
- Auto keystone (vertical) for easy setup
- Backlit menu keypad for easy access in dark environments



XD90U

MICROPORTABLE XGA DATA PROJECTOR




SCREEN						DISTANCE FROM SCREEN (L)				Hd	
Diagonal Size		Width		Height		Max.Zoom		Min.Zoom		Hd	
inch	cm	inch	cm	inch	cm	inch	m	inch	m	inch	cm
40	102	32	81	24	61	57	1.5	67	1.7	3	8
60	152	48	122	36	91	86	2.2	101	2.6	5	11
80	203	64	163	48	122	115	2.9	135	3.4	6	15
100	254	80	203	60	152	144	3.6	168	4.3	8	19
150	381	120	305	90	229	216	5.5	253	6.4	11	29
200	508	160	406	120	305	287	7.3	337	8.6	15	38
250	635	200	508	150	381	359	9.1	421	10.7	19	48
300	762	240	610	180	457	431	10.9	505	12.8	23	57

Unit measured in inches. *Hd is distance from lens axis to image bottom.

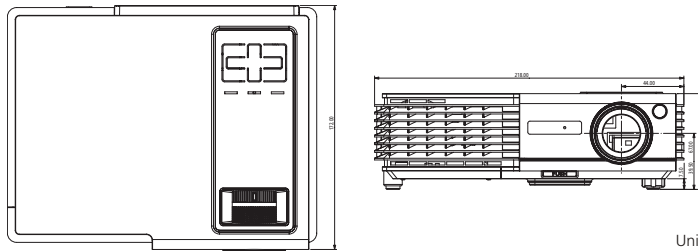

Unit measured in millimeters (mm)

DISPLAY TECHNOLOGY	0.7" 1-Chip DMD, DDP2000
RESOLUTION	1024 x 768 (Total 768,432 pixels), 550 Video lines
BRIGHTNESS	1500 ANSI lumens
CONTRAST RATIO	2000 : 1 (on/off)
ZOOM/FOCUS	Manual Focus & Zoom Lens
PROJECTION LENS	f=2.6-2.9, 145.66"@100" inches diagonal
THROW RATIO	1.79 – 2.10
OFF SET AXIS	7.9:-1
PICTURE SIZE	40-270 inches diagonal
SOURCE LAMP	Normal Mode:132W (Shut Off Time: 2000hrs), Low Mode:100W (Shut Off Time: 3000hrs)
PC COMPATIBILITY	Resolution; 640 x 400, Real 1024 x 768 + Compressed 1280 x 1024
VIDEO COMPATIBILITY	NTSC / NTSC 4.43 / PAL (including PAL-M, N) / SECAM / PAL-60 Component Video; 480i/p(525i/p), 576i/p(625i/p), 720p(750p), 1080i(1125i 60Hz), 1080i(1125i 50Hz)
INPUT TERMINALS	RGB: Mini D-sub 15pin x 1 Video: RCA x 1, S-VIDEO x 1
OUTPUT TERMINALS	N/A
COMMUNICATION TERMINAL	USB (Mini B) for Page Up / Page Down
SCANNING RATE	[H] 31-82Khz, [V] 48-83Hz
AUDIO SPEAKER	N/A
HEIGHT ADJUSTER	Front lifting leg x 1, Rear: Screw type x 1 and Fixed type
HAND HELD REMOTE	Full Projector Control
POWER CONSUMPTION	190W/2.2A
DIMENSION	8.6" x 2.6" x 6.8" (218 x 67 x 172 mm) (W x H x D)
WEIGHT	2.9 lbs. (1.3 kg.)
POWER REQUIREMENTS	AC 100-240V, 50/60 Hz
FAN NOISE	33dBA (low mode 31dBA)
SUPPLIED ACCESSORIES	<ul style="list-style-type: none"> • Power cable • USB cable • VGA (D-sub) cable • Carrying bag for Projector • Carrying bag for Accessories • Remote control (with 1 battery) • User Manual (CD-ROM) • Combine Safety manual and Quick Start manual
OPTIONAL ACCESSORIES	Replacement Lamp Part (VLT-XD90LP), Foldable Screen (SC-9930), Soft Carry Case (XL1-SSCC), Hard Rolling Case (DKT1-ATAC)
WARRANTY	3-Years Limited Parts and Labor Warranty, 3-Years Express Replacement Assistance (ERA), 90-Days Lamp Warranty, 3-Years or 10,000-hours on the TI-DLP® DMD Chip (Main Imaging Device)
OUTSTANDING FEATURES	<ul style="list-style-type: none"> • Sliding lens cover • Small lightweight design • Auto Keystone (vertical) +/-18degree • Auto Phase Adjustment • Freeze • Kensington Lock • 17 languages OSD

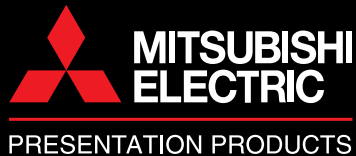

MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.
Presentation Products Division
Toll Free: 888.307.0349
Email: pppinfo@mdea.com
www.mitsubishi-presentations.com

Canada
Mitsubishi Electric Sales Canada Inc.
Information Technologies Group
Phone: 905.475.7728
www.mitsubishielectric.ca



©2007 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. All trademarks are the property of their respective holders.

PP6053-11/06-15M-LITXD90U