


Dazzle & Captivate Your Audience

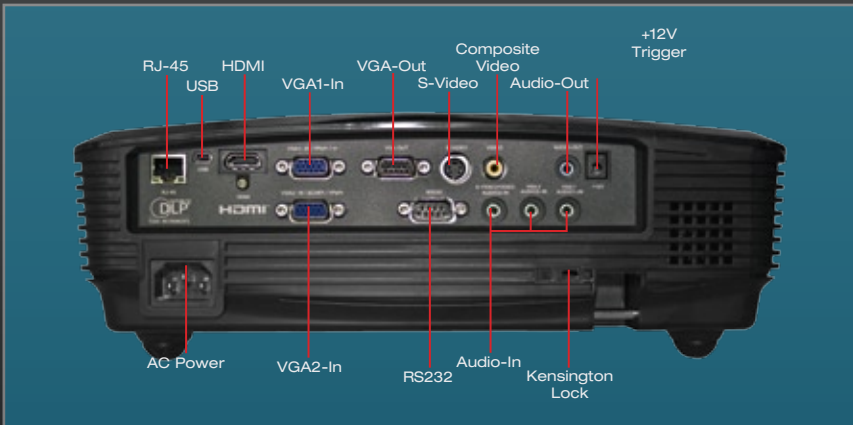

The Optoma TX615 delivers exceptional brightness to overcome ambient light, making it the ideal choice for nearly any installation. Featuring a built-in 10-watt speaker system and wired network management, the TX615 is equipped with the latest color and image processing technologies from Texas Instruments. The TX615 will surely dazzle and captivate your audience.

TX615 FEATURES


- ❑ Easy-to-read text – bright at 3400 ANSI lumens and 2500:1 high contrast ratio
- ❑ VGA and audio pass-thru operational on standby mode
- ❑ Filter-free design means lower cost of ownership
- ❑ Remote management via RS-232 or RJ45 connectivity
- ❑ Broad range of audio and video connectivity
- ❑ Wireless connectivity with optional dongle

TX615 | Multimedia Projector

Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	46	42
8	62	56
10	77	70
12	92	84
14	108	98
16	123	112
18	138	126

Control Panel

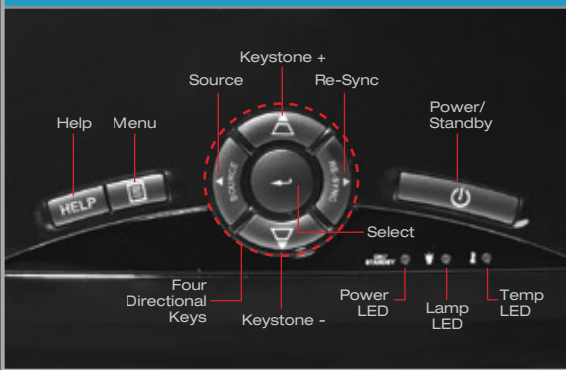

Optional Accessories

Lamp:	BL-FP230E
Remote:	BR-5030L
Power Cord (1m):	BC-PUPIX01
Power Cord (11m):	BC-PUPIX11
S-Video Cable (1.8m):	BC-SVSVXX02
Composite Cable (1.8m):	BC-COCOXX02
VGA Cable (5m):	BC-VGVGXX05
VGA to Component Cable (5m):	BC-VGCRXX05
VGA to Component Adapter:	BC-VGCRXY00
Ceiling Mount:	BM-5001U
100" Matte White 4:3 Manual Pull-Down Screen	DS-3100PM

Specifications

Display Technology:	Single 0.55" DMD DLP® Technology by Texas Instruments
Resolution:	Native XGA (1024 x 768)
Maximum Resolution:	UXGA (1600 x 1200)
Brightness (Typical):	3400 ANSI Lumens
Contrast Ratio:	2500:1 (Full On/Full Off)
Lamp Type:	230W P-VIP
Lamp Life (STD/Bright):	Estimated at 4000/3000 Hours
Throw Ratio:	1.95 to 2.15:1 (Distance/Width)
Image Size (Diagonal):	27.5" to 303" (0.7 to 7.69 m)
Projection Distance:	3.93' to 39.3' (1.2 to 12 m)
Noise Level (STD/Bright):	29dB/34dB
Remote Control:	Fully Featured Remote with Laser Pointer and Mouse Functions
Computer Compatibility:	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
Aspect Ratio:	4:3 Native, 16:9 & 16:10 Compatible
Projection Lens:	F=2.4~2.55, f=21.8~24 mm, 1.1x Zoom & Focus
Offset:	115%
Loop Through:	Monitor: D-Sub 15-Pin VGA Output Audio: Mini-Jack Output (Functional in Both Normal and Standby Modes)
User Controls:	Complete On-Screen Menu Adjustments in 23 Languages
Audio:	Two 5-Watt Speakers
Keystone Correction:	± 40° Vertical
Vertical Refresh Rate:	25 to 85 Hz
Horizontal Scan Rate:	15.3 to 91.1 KHz
Power Supply:	AC Input 100-240V, 50-60 Hz, Auto-Switching
Power Consumption:	328 Watts (Bright), 272 Watts (STD) <1 Watt (Standby)
Weight:	6.4 lbs (2.9 kg)
Dimensions (W x H x D):	12.76" x 3.82" x 9.21" (324 x 97 x 234 mm)
Operating Temperature:	41° to 104°F (5° to 40°C), 80% Max Humidity, Adjustable Fan Speed for High Altitude Application
Displayable Colors:	1.07 Billion
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	One Kensington® Lock, Keypad Lock and Security Bar
I/O Connectors:	HDMI, Two VGA-In, VGA-Out, S-Video, Composite Video, Three Audio-In, Audio-Out, +12V Trigger, USB, RS-232 and RJ45
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, USB Cable, Carrying Case, Lens Cap, Quick Start Card, CD-ROM User's Manual and Warranty Card
Optional Accessories:	Wireless Dongle, Ceiling Mount, HDMI Cable, VGA to Component Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview™ Series Screens
Warranty:	Three Years Optoma Express Replacement Service, One Year on Lamp
UPC:	796435 41 130 5

www.OptomaUSA.com

HDMI™
HIGH DEFINITION MULTIMEDIA INTERFACE



HIGH DEFINITION TELEVISION
HDTV
MONITOR



All Specifications are subject to change without notice. ©2009 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.

Data-TX615-001-0509