

Vivitek Projector. Bright Classroom. It's The Perfect Relationship.



www.vivitekcorp.com

D735VX XGA DLP® PROJECTOR

NEW

Latest DLP® and BrilliantColor™ Technology with 3200 Lumens of Ultra Brightness

- Newest projector built for classroom settings and professional venues.
- Uses the latest DLP® technology with BrilliantColor™ technology to offer exceptional brightness and vibrant hues.
- Blasts at 3,200 lumens of ultra brightness with 2,400:1 contrast ratio that shows extraordinary crisp image details and provides excellent projection under all lighting conditions.
- Offers the versatile features that comes with a cost efficient lamp life of up to 4,000 hours (Eco-Mode).

Filter-Free Design

- No filter required.
- Resistant to dust and dirt.
- Reduced maintenance fees.
- Lower total cost of ownership.

Rapid Start-Up

- Quick start.
- No need to wait for the projector to warm up.

Instant Shut-Down

- Instant power down.
- No waiting period.
- Convenient to move to next meeting.

Detachable Keypad

The D735VX comes with a detachable keypad that can be manually removed from the projector and secured in a safe location to discourage theft or unauthorized removal of the projector.



Vertical Digital Keystone

The Vertical Digital Keystone correction allows users to easily adjust the screen image with today's presentation environments.

Super Low Fan Noise

Super low noise operation - 28 dBA (low mode)



D735VX


Mobile XGA DLP® Projector



SPECIFICATIONS

MODEL	D735VX
DISPLAY TECHNOLOGY	0.55" 1-Chip DMD
RESOLUTION	XGA 1024 x 768 (Total 786,432 pixels)
BRIGHTNESS	3,200 Lumens
CONTRAST RATIO	2,400:1 (on/off)
ZOOM & FOCUS	Manual Zoom & Manual Focus
LENS THROW RATIO	1.89 - 2.18
PROJECTION SCREEN SIZE	22.57" - 260"
COLOR WHEEL	5 Segments (R, G, B, W, Y)
LAMP LIFE	230W (Shut Off Time: 4,000 hrs) with Eco-Mode
ASPECT RATIO	Native (4:3) & Compatibility (16:9)
PC COMPATIBILITY	VGA, SVGA, XGA, SXGA, Macintosh
VIDEO COMPATIBILITY	480i/480p/720p/1080i, NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM
PC INPUT TERMINALS	RGB x 1, S-Video x 1, Composite x 1, RCA Stereo x 1, Mini audio jack x 1, RS-232C x 1
OUTPUT TERMINALS	RGB (D-Sub) x 1, Audio Mini-Jack x 1
KEystone CORRECTION	Vertical (+/- 15 degree)
COMMUNICATION TERMINALS	USB (Type B) x 1, RS-232C x 1
FAN NOISE LEVEL	28dB (Eco-Mode), 33 dB (Standard Mode)
AUDIO SPEAKER	3W Mono Speaker
DIMENSIONS (W x H x D)	11.8" x 9.6" x 3.5" inches
WEIGHT	7.8 lbs
POWER SUPPLY	AC 110-240V
POWER CONSUMPTION	Eco (230W), Standard (290W)
REPLACEMENT LAMP	5811100458-S
WARRANTY	3-Year Parts and Labor, 1-Year lamp warranty, and *5-Year DLP® Chip
ACCESSORIES	AC Power cord, VGA cable, Remote Control

Screen Size and Projection Distance

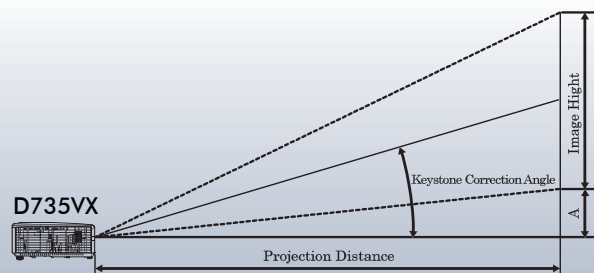

D735VX	TELE				WIDE			
Distance (feet)	3.2'	9.6'	16.4'	32.8'	3.2'	9.6'	16.4'	32.8'
Diagonal (inches)	22.6"	67.7"	113"	226"	26"	78.1"	130.2"	260"
Keystone Correction	12.3	12.3	12.3	12.3	14.2	14.2	14.2	14.2
Offset Distance A	5.2	15.5	25.8	51.6	59	17.8	29.7	59.4

The above numbers are approximate, and may be slightly different from the actual measurements.

Input and Output Terminals



- 1 RS-232C
- 2 VGA (Input)
- 3 USB (Type B)
- 4 VGA (Output)
- 5 S-Video
- 6 Video (Input)
- 7 PC Audio-In
- 8 PC Audio-Out
- 9 Video (Left)
- 10 Video (Right)

©2009 Vivitek Corporation. Standard features, options and specifications subject to change without notice. Vivitek is a trademark of Vivitek Corporation. DLP logo and DLP medallion are trademarks of Texas Instruments. All other trademarks are the property of their respective holders.

01/09 - LTID735VX - US

VIVITEK CORPORATION

Tel: 626-369-8420

Email: info@vivitekcorp.com

www.vivitekcorp.com

*5 Year DLP® chip warranty is supported with the same process and terms/conditions as the 3-year warranty

