



# REALiS WX6000

## PRO AV PROJECTOR


### Next-Generation Imaging Quality

Full 16:10 aspect ratio display of widescreen imagery from laptop and desktop computers – and from Blu-ray players and other high definition sources connected via handy HDMI 1.3 or DVI-I connectors – is easily accomplished using the REALiS WX6000 Pro AV Projector. Equipped with new LCOS (Liquid Crystal on Silicon) display panels featuring an improved pixel-spacing aperture ratio of 96% for seamless imagery – and enhanced by Version 4.1 of Canon's revolutionary AISYS (Aspectual Illumination System) optical technology – the REALiS WX6000 displays exceptional 5700 lumen video and still images at WXGA+ (1400 x 900) resolution. Added advantages to the WX6000's advanced imaging technologies include better white balance, improved reliability and durability, and outstanding energy efficiency. Advanced color tools (6-axis Color Adjustment, Color Correction IC, and 3D Color LUT) also help provide high color reproducibility and user control.



### Key Features

- ▶ 5700 Lumen Brightness
- ▶ Native WXGA+ (1400 x 900) Resolution
- ▶ Widescreen 16:10 Aspect Ratio
- ▶ 1000:1 Contrast Ratio
- ▶ AISYS 4.1 Optical Technology
- ▶ Advanced White Balance
- ▶ Improved Reliability and Durability
- ▶ Outstanding Energy Efficiency
- ▶ Integrated Test Patterns

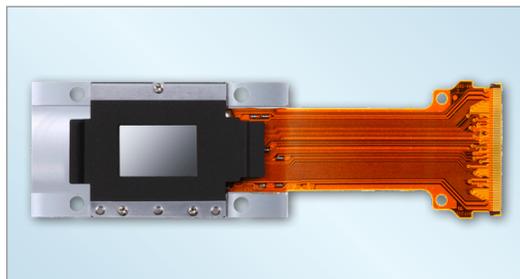

*New 96% aperture ratio LCOS panels help provide seamless imagery and also offer increased burn-in resistance.*

### Recommended For:

- ▶ Higher Education
- ▶ Houses of Worship
- ▶ Museums
- ▶ Conference Centers
- ▶ Engineering Labs
- ▶ Government and Military
- ▶ Photo Studios/Galleries

**REALiS** WX6000

**Canon**



# REALiS WX6000 PRO AV PROJECTOR

PRODUCT NAME: REALiS WX6000 ITEM CODE: 5757B002 UPC CODE: 013803142686

## SPECIFICATIONS

BASIC	IMAGING DEVICE		0.70" LCOS Reflective LCD panels x 3	
	ASPECT RATIO		16:10	
	NATIVE RESOLUTION		1440 x 900 (WXGA+)	
	BRIGHTNESS		5700 Lumens	
	UNIFORMITY		88%	
	CONTRAST RATIO		1000:1	
KEYSTONE CORRECTION	VERTICAL	± 20°		
	HORIZONTAL	± 20°		
IMAGE ADJUSTMENTS	IMAGE MODE		Standard, Presentation, Vivid Photo, Photo/sRGB, Dynamic, Video, Cinema, User 1-5	
	MOUNTING		Ceiling, Rear, Rear-Ceiling, Upward, Downward	
	TILT ANGLE		Adjustable feet up to 6 degrees	
INPUT SIGNALS	DIGITAL PC INPUT		UXGA / WSXGA+ / SXGA+ / WXGA+ / WXGA / SXGA / XGA / SVGA / VGA	
	ANALOG INPUT		UXGA / WSXGA+ / SXGA+ / WXGA+ / WXGA / SXGA / XGA / SVGA / VGA	
	SCANNING FREQUENCY		H Freq. 15.625-75 KHz V Freq. 50-60.317 Hz Max dot clock 162 MHz	
	DIGITAL VIDEO INPUT		1080p / 1080i / 720p / 576p / 480p	
	COMPONENT INPUT		1080p / 1080i / 720p / 576p / 576i / 480p / 480i	
	TERMINALS	INPUT	DVI-I 29PIN	Analog PC / Digital PC input
HDMI			Version 1.3 Deep Color Digital PC / Digital Video Input	
MINI D-SUB 15PIN			Analog PC / Component Video Input	
CONTROL		MINI JACK	Stereo Input x 2	
		MINI JACK	Wired remote control connection x1	
		D-SUB 9 PIN	RS-232C Control	
		RJ-45	Network (100BASE-TX / 10BASE-T)	
		BUILT-IN SPEAKER	5W (Mono)	
LAMP	LAMP	TYPE	330W NSH (AC)	
	LAMP LIFE	3000 Hours		
REMOTE CONTROL	REMOTE CONTROL	SENSOR	Wireless Infrared, Front/Back Wired Remote Control Connection	
RATINGS	FAN NOISE		40dB	
	POWER	CONSUMPTION	435W / 1.7W (Standby) / 0.35W (Standby with LAN off)	
		VOLTAGE	AC100 ~ 240V, 50 / 60 Hz	
	TEMPERATURE	OPERATING	41° to 95° F (5° to 35° C) 85% RH or less	
		STORAGE	14° ~ 140° F (-10° ~ 60° C)	
	DIMENSIONS (W X D X H)		15 x 6.69 x 16.9 in. (without lens, including protruding parts)	
WEIGHT		18.74 lb. (without lens)		

## OPTIONAL ACCESSORIES


Item Code No.	Description
4966B001	Standard Zoom Lens RS-IL01ST
4967B001	Long Focus Zoom Lens RS-IL02LZ
4968B001	Ultra Wide-Angle Lens RS-IL03WF
5017B001	Replacement Lamp RS-LP07
4971B001	Replacement Air Filter RS-FL01
5750B001	Wired Remote Controller RS-RC05
4969B001	Ceiling Mount RS-CL11
3096B001	Ceiling Extension RS-CL08 (16" - 24")
3097B001	Ceiling Extension RS-CL09 (24" - 39")
5471B001	Top Cover RS-TC01 (Dark Grey)

## Accessories



Three high-resolution interchangeable Genuine Canon projection lenses are available for the REALiS WX6000 Pro AV Projector. These include a 1.5x Standard Zoom, a 0.8x Ultra Wide-Angle lens, and a 1.7x Long-Focus Zoom. Each lens features advanced low-distortion and high-resolution optical technologies originally developed for Canon's world-renowned line of EF lenses.

## Connectability

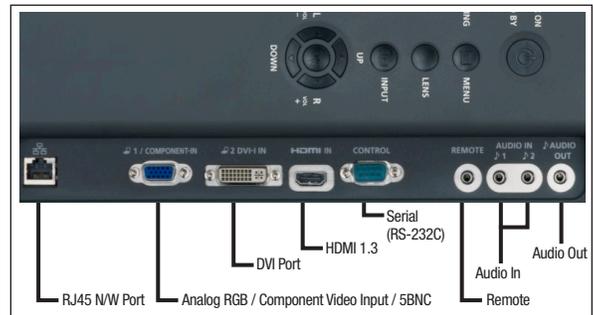

Expanded interface options include DVI-I, HDMI 1.3, and analog RGB inputs. Control connections include a network-ready RJ-45 port and RS-232C serial connection. A separate stereo mini-jack input enables direct connection with the hand-held remote-control, if desired.

©2012 Canon U.S.A., Inc. All rights reserved. Not responsible for typographical errors. Specifications subject to change without notice. Canon and REALiS are registered trademarks of Canon Inc. in the United States and may also be trademarks or registered trademarks in other countries. IMAGEANYWARE is a trademark of Canon. All other products and brand names may be registered trademarks, trademarks or service marks of their respective owners in the United States and/or other countries.



For more info:  
Call 1-800-OK-CANON (1-800-652-2666)  
pro.usa.canon.com

## LENS SPECIFICATIONS

PRODUCT NAME		WX6000	
3 LENS OPTIONS	RS-IL01ST STANDARD ZOOM LENS	PROJECTION LENS	F1.89 - 2.65 / f= 23.0 - 34.5 mm
		LENS SHIFT*	(Vertical) Down 15% ~ Up 55% / (Horizontal) Left 10% ~ Right 10%
		ZOOM	1.5 x Optical Zoom (Powered)
		FOCUS	Powered
		SCREEN SIZE	40" to 600"
		PROJECTION DISTANCE	4.3-31.5 ft (1.3-9.6 m) / 100": 10.5 - 15.7 ft. (3.2-4.8 m)
	RS-IL02LZ LONG FOCUS ZOOM LENS	THROW RATIO	1.5:1 ~ 2.21:1
		PROJECTION LENS	F1.99 - 2.83 / f= 34.0 - 57.7 mm
		LENS SHIFT*	(Vertical) Down 15% ~ Up 55% / (Horizontal) Left 10% ~ Right 10%
		ZOOM	1.7 x Optical Zoom (Powered)
		FOCUS	Powered
		SCREEN SIZE	40" to 600"
RS-IL03WF ULTRA WIDE-ANGLE LENS	PROJECTION DISTANCE	6.23 ~ 46.59 ft (1.9-14.2 m) / 100": 15.4 - 26.24 ft. (4.7 - 8.0 m)	
	THROW RATIO	2.1:1 - 3.72:1	
	PROJECTION LENS	F2.0 / f= 12.8 mm	
	LENS SHIFT*	(Vertical) Down 5% ~ Up 5% / (Horizontal) Left 2% ~ Right 2%	
	ZOOM	Fixed	
	FOCUS	Powered	
SCREEN SIZE	40" to 300"		
PROJECTION DISTANCE	2.3 - 17.1 ft (0.7 - 5.2 m) / 100": 5.6 ft (1.7 m)		
THROW RATIO	0.8:1		

\*The maximum upward shift and the maximum horizontal shift cannot be used simultaneously.