EPSON **EXCEED YOUR VISIOI**

PowerLite[®] 92

Multimedia Projector

Product Name	Product Code	UPC
PowerLite 92 projector	V11H381020	0 10343 880
Genuine Epson lamp	V13H010L60	0 10343 880
Replacement air filter	V13H134A29	0 10343 880
•		

Specifications

Projection System Epson 3LCD, 3-chip technology **Projection Method** Front/rear/ceiling mount **Driving Method** Epson Poly-silicon TFT Active Matrix Pixel Number 786.432 dots (1024 x 768) x 3 White Light Output 2400 lumens (ISO 21118 standard)

Color Light Output² 2400 lumens Aspect Ratio

4.3 Native Resolution 1024 x 768 (XGA)

Resize

640 x 480 (VGA), 800 x 600 (SVGA), 1152 x 864 (SXGA), 1280 x 800 (WXGA), 1280 x 960 (SXGA2), 1280 x 1024 (SXGA3). 1280 x 768 (WXGA 60-1) 1360 x 768 (WXGA 60-2), 1440 x 900 (WXGA+), 1400 x 105 (SXGA+), 1600 x 1200 (UXGA) Lamp Type 200 W UHE (E-TORL) Lamp Life¹ Up to 6000 hours (ECO Mode) Up to 5000 hours (Normal Mode) **Throw Ratio Range** 1.48 - 1.77Size (projected distance) 30" to 300" (0.9 to 9.0 m)

Keystone Correction Automatic Vertical: ± 30 degrees

Keystone Correction Manual Horizontal: ± 30 degrees **Mac Connectivity**

Projector is Mac compatible via USB. DVI to HDMI or VGA adapter (not included) **Contrast Ratio**

Up to 2000:1 **Color Reproduction**

16.77 million colors


	1.58 – 1.72
	Focal Length
	16.9 mm – 20.28 mm
	Zoom Ratio
	Optical zoom 1.0 – 1.2
	Other
	Display Performance NTSC: 480 lines PAL: 576 lines (Depends on observation of the multi- burst pattern)
	Input Signal 43/PAL/M-PAL/N-PAL/PAL60/SECAM
50	Interfaces Computer/component video: D-sub 15 pin x 2 S-video: Mini DIN x 1 Composite video: RCA (Yellow) x 1 Audio in: RCA x 1 (L and R) Mini stereo x 2 USB connector: Type B x 1 (USB display, audio and mouse control) USB connector: Type A x 1 (USB memory/ document camera) HDMI x 1 Monitor out: D-sub 15 pin x 1 Variable audio out: Mini stereo x 1 Serial: RS-232c x 1 Speaker 16 W (mono) Operating Temperature 41 * to 95 °F (5 * to 35 °C) Power Supply Voltage 100 – 240 V ± 10%, 50/60 Hz Power Consumption 312 W 0.3 W Standby (communication off) Fan Noise 33 dB (Normal Mode) 28 dB (ECO Mode) Security Kensington-style lock provision Padlock and security cable hole
	Password protect function

Projection Lens

Manual optical zoom/Manual focus

Type

F-numbe

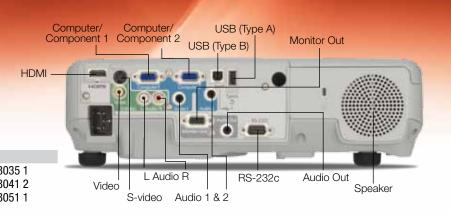

Dimensions (W x D x H) Including feet: 13.6" x 10.3" x 4.2"

Excluding feet: 13.6" x 10.3" x 3.7" Weight: 6.9 lb

Remote Control

Features Source search, video, computer, USB, power aspect, color mode, volume, e-zoom, A/V mute, freeze, menu, page up and down, help, auto, mouse functions, user, esc **Operating Angle** Right/left: ± 30 degrees Upper/lower: ± 30 degrees

Support

19' (6 m)

Operating Distance

The Epson Connection^s Pre-sales support U.S. and Canada 800-463-7766 Internet website www.enson.com Service Programs Two-year projector limited warranty, Epson Road Service program. PrivateLine® dedicated tollfree support and 90-day limited lamp warranty What's In The Box PowerLite 92 projector, power cord, computer cable (VGA), projector remote control, batteries, user manual CD, Quick Setup Sheet, PrivateLine support card and password protection sticker

Accessory Part Numbers			
Genuine Epson lamp	V13H010L60		
Air filter	V13H134A29		
Epson DC-06 document camera	L		
(ELPDC06)	V12H321005		
Epson DC-10s document camer	a ELPDC10S		
Epson DC-11 document camera			
(ELPDC11)	V12H377020		
AP-60 projector sound solution	V12H329020		
Universal projector ceiling mour	nt ELPMBPJF		
Adjustable suspended ceiling			
channel kit	ELPMBP01		
False ceiling plate kit	ELPMBP02		
Structural round ceiling plate	ELPMBP03		
Adjustable extension column			
(pipe) 8"-11"	ELPMBC01		
Component to VGA cable	ELPKC19		
Kensington security lock	ELPSL01		
Soft carrying case (ELPKS64)	V12H001K64		
50" portable screen	ELPSC06		
Duet [™] screen	ELPSC80		
ES3000 portable screen			
(ELPSC26H)	V12H002S3Y		
BrightLink Solo [™] interactive			
module (IU-01)	V12H415020		
BrightLink Solo interactive			
module with RM Easiteach			
(IU-01)	V12H415020RM		

Packaging Specifications

PowerLite 92 Dimensions: 19.1" x 14.1" x 6.7" (W x D x H) Weight: 10.8 lb Genuine Epson Lamp Dimensions: 6.3" x 5.6" x 5.6" (W x D x H) Weight: 0.7 lb

Master Carton Dimensions: 28.4" x 13.1" x 6.8" (W x D x H) Weight: 9.5 lb Units Per Master Carton: 10 **Replacement Air Filter**

Dimensions: 4.9" x 3.9" x 1.2" (W x D x H) Weight: 0.1 lb Master Carton Dimensions: 12.7" x 5.2" x 4.6" (W x D x H) Weight: 1.1 lb Units Per Master Carton: 10

Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time.

White and color light output will vary depending on mode selected. White light output measured using ISO 21118 standard. Data source: ProjectorCentral.com, Jan. 2010. Average of 910 shipping models for which the manufacturers provided lumens and total power data, all resolutions and brightness levels. See our website for convenient and reasonable recycling options at www.epson.com/recycle

5 SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency.

Epson America, Inc.	
3840 Kilroy Airport Way, Long Beach, CA 90806	

Epson Canada, Ltd. 3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

www.epson.com www.epson.ca

Specifications and terms are subject to change without notice. Epson, E-TORL and Instant Off are registered trademarks, Epson Exceed Your Vision is a registered logomark and Better Products for a Better Future is a trademark of Seiko Epson Corporation. PowerLite and PrivateLine are registered trademarks, BrightLink Solo and Duet are trademarks and Epson Connection is a service mark of Epson America, Inc. SmartWay is a service mark of the U.S. Environmental Protection Agency. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Copyright 2011 Epson America, Inc. CPD-33686 1/11





Amazing image quality and sound. **Remarkable value.**

Deliver bright, compelling presentations with the easy-to-use PowerLite 92. A budget-friendly solution for any classroom, the PowerLite 92 is equipped with convenient, education-friendly features. High brightness and XGA resolution ensure great image quality, while the premium, 16 W speaker delivers powerful audio, without added cost. Engage students with the latest content via an HDMI input. A built-in closed captioning decoder accommodates students with hearing impairments. And, the E-TORL® lamp stretches your equipment dollar with an impressive lamp life up to 6000 hours.¹ Set up the projector in a flash using USB Plug 'n Play to display images and transmit audio, all with a single connection.

Bright and engaging — 2400 lumens color light output, 2400 lumens white light output² and XGA (1024 x 768) resolution

Powerful 16 W speaker — no external speakers required; saves on equipment costs **Future-ready connectivity** — HDMI input for digital connectivity with the latest laptops and media players; delivers high-quality audio and video with just one cable

PowerLite® 92 MULTIMEDIA PROJECTOR



The best-selling projectors in the world.

Epson understands education and has a solution no matter what your teaching scenario. Built with image guality and reliability in mind, Epson projectors enhance communication and inspire collaboration, while offering a low total cost of ownership. From long-throw projectors designed for traditional educational settings to ultra-short-throw and all-in-one solutions built for progressive classrooms, Epson has the model made for you.

3LCD technology — for quality and color that's beyond amazing

3LCD chips

Energy-efficient E-TORL lamp, exclusively

Innovative technology with proven reliability

• 3 chips for true-to-life color

3LCD, 3-chip technology

• Long lamp life lasts up to

• Minimizes both light diffraction

• E-TORL lamps maximize your

presentation time, while

minimizing your costs

from Epson

6000 hours¹

and light leakage

- 25% less electricity required per lumen of brightness when compared to 1-chip DLP projectors³
- Road-tested reliability from a company with over 20 years of experience



Amazing light output

- 2400 lumens color light output and 2400 lumens white light output²
- High color light output for bright, balanced, colorful images
- White light output that's measured using ISO 21118 (a more rigid standard than the outdated ANSI lumens rating used by some competitive products)





Low color light output

Actual photographs of images taken from two competing projectors run in default mode. Price, resolution and brightness (white light output) are the same for both projectors.



Compact and portable design

Better Products for a Better Future™

For more information on Epson's environmental programs, go to eco.epson.com

Eco Features

- Energy-efficient 3LCD light engine
- Low power consumption of 0.3 W in Standby Mode (communication off)
- Energy-efficient E-TORL lamp
- Designed to be recycled⁴
- Epson America, Inc. is a SmartWay[™] Transport Partner⁵



High-quality images with HDMI digital connectivity

- Deliver both audio and brilliant video content with just one cable HOMI
- Compatible with the latest laptops, Blu-ray[®] and media players

Advanced 3-in-1 USB Plug 'n Play instant setup

- Three features, all with one standard USB connection — display your presentation, transmit audio and control your presentation
- Compatible with Windows[®] and Mac[®]
- No more computer function keys or bulky VGA cables

Built-in closed captioning

• Essential for education — helps meet ADA508 requirements for students with hearing impairments

ISE

- CC • Helps save money — no need to pay for an additional decoder and its installation
- Effective and easy to use --- easily enabled or disabled through the projector remote or menu



Fast, easy setup and control


- 1.2x optical zoom and automatic vertical keystone correction (+/- 30 degrees) — offers easy picture adjustments and great positioning flexibility
- Manual horizontal keystone correction (+/- 30 degrees) for the ultimate placement flexibility
- Direct Power On/Off power the projector on and off with the flip of a light switch
- Instant Off[®] no cool-down time required, so it's ready to shut down when you are
- A/V Mute control your presentation using the remote or by closing the slide; it's right at your fingertips
- Sleep Mode set from 1 to 30 minutes to save energy and lamp life when the A/V Mute Slide is closed or no signal is detected
- Easy to use large and intuitive control panel













Dichroic mirro

Dichroic mirro


E-TORL lamp

Additional Features

- rsatile connectivity for the classroom HDMI. USB, audio out, monitor out, computer/VGA inputs and RS-232c
- Expanded USB functionality partner your projector directly with the Epson DC-06 document camera, or, deliver PC-free slideshows using a USB flashdrive (supports multiple file formats - JPEG, PNG, GIF and BMP)
- Easy maintenance easy lamp and air filter access for quick, convenient replacements
- Added security in any environment convenient metal anchor bar and Kensington® lock support
- New high-density filter twice the surface area of our previous generation adds a higher level of protection

Built-in teaching aids save time

- Choose from four pre-set templates or create a custom template to project lines or grids onto whiteboards or chalkboards
- Eliminates the need to draw lines on the board, use grids for graphs and more
- Simply display the pattern by using the customizable User button on the projector remote control



Filters to protect your investment

Because we know how important it is to protect your valuable investment, Epson has designed this 3LCD projector with a higher density filter to give you added peace of mind. A filter helps limit the amount of dust that can settle on the internal components and reduce the lamp life or dull the image. When the time comes to clean or change the filter, just open the filter door, vacuum the dust off or replace the filter, close the door, and you're done!