

# 3D GAMING PROJECTOR GT760



## A PROJECTOR THAT PLAYS AS HARD AS YOU DO



-  Perfect gaming projector for space constrained environments
-  Designed for fast, flawless performance with today's gaming consoles
-  3400 lumens bright image with a remarkable 20,000:1 contrast ratio so you will not miss any of the action
-  Full 3D for the most amazing, most immersive gaming experience
-  Long lamp life for economical operation



The Optoma GT760 was designed with the serious gamer in mind. Delivers super large, stunningly fast, 3400 lumens bright, crystal clear games, movies and graphics with amazingly vibrant and accurate colors. Perfect for space constrained environments.

Experience the full potential of your state of the art gaming console and see your games in a whole new way with 2D and 3D images of up to 300 inches.

The Optoma GT760 is reliable and economical. Featuring the latest Optoma Eco+ advancements for ultra long lamp life and its DLP based display technology, along with Optoma's commitment to quality ensures your projector will provide years of care-free operation.

## CONNECTIVITY (May require optional accessories)



## 3D GAMING PROJECTOR — GT760

### OPTICAL/TECHNICAL SPECIFICATIONS


<b>Display Technology</b>	Single 0.65" DC3 DMD DLP® Technology by Texas Instruments™
<b>Native Resolution</b>	720p (1280 x 720)
<b>Maximum Resolution</b>	WUXGA (1920 x 1200)
<b>Brightness</b>	3400 lumens
<b>Contrast Ratio</b>	20,000:1 (full on/full off)
<b>Displayable Colors</b>	1.07 Billion
<b>Lamp Life and Type*</b>	6500/6000/4500 Hours (ECO+/ECO/normal)
<b>Projection Method</b>	Front, rear, ceiling mount, table top
<b>Keystone Correction</b>	±40° Vertical
<b>Uniformity</b>	>80%
<b>Offset</b>	112%
<b>Aspect Ratio</b>	16:10 Native, 16:9 & 4:3 compatible
<b>Throw Ratio</b>	0.52 (distance/width)
<b>Projection Distance</b>	1.3'–32.8' (0.4–10 m)
<b>Image Size (Diagonal)</b>	69"–300"
<b>Projection Lens</b>	F=2.8, f=7.51 mm manual focus
<b>Digital Zoom</b>	0.8 ~ 2.0
<b>Audio</b>	One 2-Watt speaker
<b>Noise Level</b>	29dB
<b>Remote Control</b>	IR remote mouse control
<b>Operating Temperature</b>	41–104°F (5–40°C), 85% max humidity
<b>Power Supply</b>	AC input 100–240V, 50–60Hz, auto-switching
<b>Power Consumption</b>	Max 258W (Normal), Min 205W (Eco+), <0.5W (standby-ECO)

### COMPATIBILITY SPECIFICATIONS

<b>Computer Compatibility</b>	WUXGA, UXGA, SXGA+, WXGA+, WXGA, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
<b>Video Input Compatibility</b>	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
<b>3D Compatibility<sup>†</sup></b>	Supports all HDMI 1.4a mandatory 3D format, side-by-side format and top and bottom format. 3D glasses are needed and sold separately.
<b>Vertical Scan Rate</b>	24–85Hz, 120Hz, 144Hz
<b>Horizontal Scan Rate</b>	15.3–91.1KHz
<b>User Controls</b>	Complete on-screen menu, adjustments in 22 languages
<b>I/O Connection Ports</b>	HDMI, two VGA-in, VGA-out, composite video, audio-in, audio-out, RS-232C and USB-B

### PHYSICAL SPECIFICATIONS

<b>Security</b>	Kensington® lock port and keypad lock
<b>Weight</b>	5.9 lb (2.7 kg)
<b>Dimensions (W x H x D)</b>	11.3" x 3.9" x 9.6"

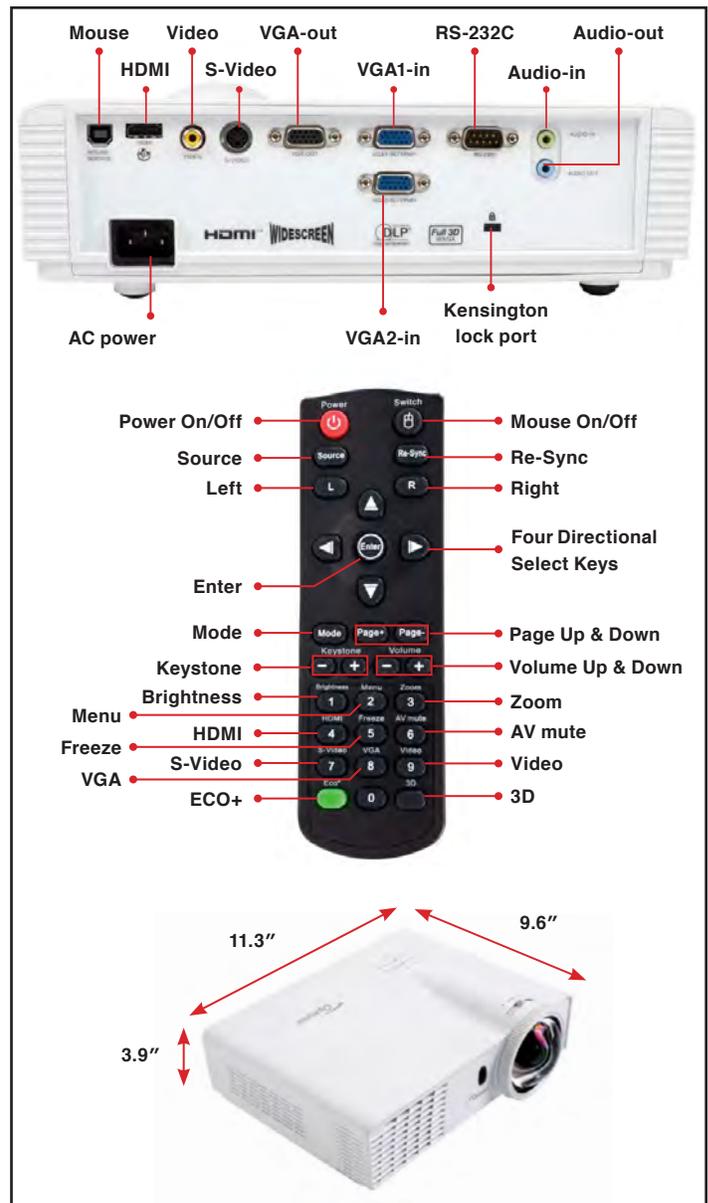

#### Warranty

1-Year Limited Parts and Labor, 90-Day on Lamp

#### In the Box (Standard Accessories)

AC power cord, remote control, batteries for remote, lens cap, multilingual CD-ROM user's manual, quick start card, and warranty card

#### Optional Accessories

HDMI cable, ceiling mount, component to VGA cable, RS-232 cable, Optoma screen, DLP® Link™ 3D glasses

#### Accessory Part Numbers

Lamp: BL-FU190D	Remote: BR-5048N
Power cord (11M): BC-PUPIX11	DLP® Link™ glasses: BG-ZD301
VGA to component adaptor: BC-VGCRXY00	VGA Dongle: BI-EXTBG03

UPC 796435 41 884 7

www.OptomaUSA.com

**Optoma**  
Projector Expert

\*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

<sup>†</sup>3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

Copyright © 2013 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time.