



# Epson PowerLite<sup>®</sup> 750c

Travel light. Shine bright.

The ultra light Epson PowerLite 750c makes brilliant presentations a snap — even in well lit meeting rooms. With 2000 ANSI lumens plus Epson 3LCD™ technology, it offers remarkable quality and performance in a lightweight, travel-friendly projector.

Ideal for on-the-go presenters, this powerful performer provides many high-end features that ensure easy operation and incredible flexibility, along with the Instant Off™ feature. And, with Epson's fast start-up time, the projector's ready when you are. With the Epson PowerLite 750c, you get automatic source selection, auto keystone correction and a 1.2x optical zoom — all from a 3.8 lb XGA projector. Best of all, it's nicely protected and easily transported in the conveniently included carrying case.

## 2000 ANSI lumens—lightweight and priced to please!

- A high-value, sub-4 lb performer that performs where you need it.
- Ideal for on-the-go presenters and those who require incredible brightness from a small, lightweight projector.

## Superior image quality and performance

- Epson 3LCD technology for incredible color accuracy, rich color saturation, and remarkable image quality
- XGA (1024 x 768) resolution for vibrant images with precision color and detail

## Easy setup and operation

- 7-second start-up for fast setup and convenient Instant Off™ for no cool down time
- Power-on and -off beeps confirm user commands and avoid confusing startups and shutdowns
- Source search function automatically displays the connected input source(s) and switches instantly between them
- Automatic vertical keystone correction for square images even when the projector is not centered  
- +/-30° digital keystone correction that automatically engages
- 1.2x optical zoom lens to facilitate flexible placement and positioning and still maintain image quality
- Full-featured remote control, with mouse emulation functions and an electronic pointer for complete presentation control
- Password-protected security features, plus operation lock to prevent theft or unauthorized usage
- Brightness control function can extend the lamp life and provide more cost-effective operation (3000 hours in Low Brightness mode, 2000 hours in High Brightness mode)
- Soft carrying case included

## State-of-the-art video performance


- Video inputs for composite, component (optional cable required), and S-video compatibility
- HDTV-ready; supports 480i, 480p, 720p, and 1080i formats
- Selectable projection modes, including video games and home theater, for optimum performance in any situation

## Outstanding Epson service and support (two-year limited warranty)

- 90-day lamp warranty for added dependability
- Epson Road Service program provides a replacement projector, typically within 1 business day
- Epson PrivateLine<sup>SM</sup> dedicated toll-free support line available from 6 a.m. to 6 p.m. PST Monday - Friday (Calls are answered live, typically in about a minute.)
- International warranty in over 45 countries



Front View

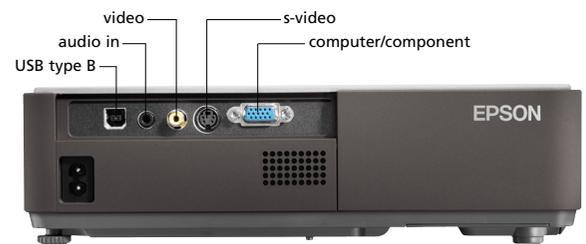

Back View

# Epson PowerLite 750c Specifications

<b>Projection System</b>	Epson original LCD technology
<b>Projection Method</b>	Front/rear/ceiling mount
<b>LCD</b>	
Driving method	Epson High Temperature Poly-Silicon TFT
Pixel number	786,432 dots x 3 (1024 x 768) LCDs
Native resolution	XGA
Aspect ratio	4:3 (supports 16:9, 5:4)
Pixel arrangement	Stripe
<b>Projection Lens</b>	
Type	Manual: zoom / focus
F-number	1.58 – 1.76
f-number	23.7 – 28.5mm
Zoom ratio	1.0:1.2
<b>Lamp</b>	
Type	170W UHE
Life*	2000H (High Brightness), 3000H (Low Brightness)
<b>Screen Width Ratio</b> (Distance/width)	1.58 to 1.64:1
<b>Screen Size</b> (Projected distance)	30" to 300" (2.9' to 34.4')
<b>Keystone Correction</b>	Vertical: +/-30° Auto Keystone Correction Vertical: +/-30°
<b>Brightness</b> (Typical)	2000 ANSI lumens (High Brightness) 1500 ANSI lumens (Low Brightness)
<b>Contrast Ratio</b>	400:1
<b>Brightness Uniformity</b> (Typical)	90%
<b>Color Reproduction</b>	24 bit; 16.7 mil
<b>Audio Output</b>	1W Monaural
<b>Operating Temperature</b>	41°F to 95°F (5°C to 35°C)
<b>Power Supply Voltage</b>	100-240VAC +/-10%, 50/60Hz
<b>Power Consumption</b>	240W/35W Network On at sleep mode 4W Network Off at sleep mode
<b>Dimensions</b>	7.6" x 10.8" x 2.7"
<b>Weight</b>	3.8lb
<b>Fan Noise</b>	40db (High Brightness), 35db (Low Brightness)
<b>Effective Scanning Frequency Range</b>	
Pixel clock	13.5MHz to 162MHz
Horizontal	15KHz to 92KHz
Vertical	50Hz to 85Hz
<b>Remote Control</b>	
Features	Focus, zoom, keystone, source selection, power, page up/page down, color mode, volume, e-zoom, a/v mute, freeze, resize, menu, help, auto, pointer
Operating Angle	Right/Left +/- 30 degrees Upper/Lower +/- 15 degrees
Operating Distance	20 ft (6m)
<b>RGB</b>	
Analog RGB I/O	
Display performance	
Native	1024 x 768
Resize	1600 x 1200, 1280 x 1024, 800 x 600, 640 x 480
Input terminal	
Video	Mini D-sub 15 pin
Audio	Stereo mini jack

\*Lamp life results will vary depending upon mode selected, environmental conditions, and usage.

<b>Video I/O</b>	
Display performance	NTSC: 560 lines PAL: 560 lines (Depends on observation of the multi burst pattern)
Input signal	NTSC, NTSC4.43, PAL, M-PAL, N-PAL, PAL60, SECAM HDTV: 480i, 480p, 720p, 1080i
Input terminal	
Video	Composite Video: RCA (Yellow); S-Video: Mini DIN; Component Video: Mini D-sub 15pin (in common with Analog RGB connector); Video-RGB: Mini D-sub 15pin (in common with Analog RGB connector)
Audio	Stereo minijack
Audio signal	500m Vrms/47Kohm
<b>Control I/O</b>	
I/O terminal	USB connector series B (for mouse, keyboard)

**Security** Kensington®-style lock provision

**Warranty** Two-year limited warranty, two-year international warranty, 90-day lamp warranty, Epson Road Service Program and Epson PrivateLine dedicated toll-free support (U.S. and Canada only)

## Supplied Accessories

Power cable, remote control with battery, computer cable, audio adapter cable, USB A/USB B cable, Owners Manual, Start Here Kit, soft carrying case

## Product/Accessory Part Numbers

Epson PowerLite 750c projector	V11H201020
Replacement lamp	V13H010L32
Air filter set	V13H134A08
Samsonite wheeled soft case w/laptop	ELPKS35-S
Samsonite soft shoulder case	ELPKS43
ATA molded hardshell case	ELPKS42
Ceiling mount	ELPMBUNI
Suspension adapter	ELPMBAPL
False ceiling plate	ELPMBFCP
Security bracket/cabling for gyro lock mounts	ELPMBSEC
Adjustable ceiling channel	ELPMBACC
Component video cable	ELPKC19
S-Video cable	ELPSV01
Distribution Amplifier	ELPDA01
Mac adapter set	ELPAP01
50" portable screen	ELPSC06
60" portable pop-up screen	ELPSC07
80" portable pop-up screen	ELPSC08
Classroom style pull-down screen (83.6")	ELPSC09
High-Resolution Document Imager (ELPDC05)	V12H162020
Kensington security lock	ELPSL01

## Support—The Epson Connection<sup>SM</sup>

Pre-Sales Support U.S. and Canada 800-463-7766  
Automated Technical Support 800-922-8911  
Internet Web Site [www.epson.com](http://www.epson.com)

## Presenters ONLINE<sup>SM</sup>

[presentersonline.com](http://presentersonline.com)



**EPSON**<sup>®</sup>  
EXCEED YOUR VISION

**Epson America, Inc.**  
3840 Kilroy Airport Way, Long Beach, CA 90806

**Epson Canada, Ltd.**  
3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

Specifications and terms are subject to change without notice. Epson and Exceed Your Vision are registered trademarks of Seiko Epson Corporation. PowerLite is a registered trademark, and Epson Connection, PrivateLine and Presenters Online are service marks of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. © Copyright 2005 Epson America, Inc. CPD-20071 15K 7/05