

LightStream™ XGA 1024x768 Networkable Projector

True-to-Life Color + Smart Design

ViewSonic®
See the difference® 

PJD6350



Featuring true-to-life color and a smart design, the ViewSonic® LightStream™ PJD6350 networkable projector makes the grade in any classroom, and helps corporate users rise to the top in any boardroom. Equipped with SuperColor™ technology and a high-brightness output, this projector strikes a perfect balance of color and light to deliver the ultimate in color accuracy without compromise. In addition to incredible screen performance, the PJD6350 projector features a smart and intuitive design that includes a tactile keypad for simple operation, a programmable remote control, and PortAll™—a hidden compartment with an integrated MHL/HDMI® port that lets you discretely and wirelessly stream multimedia content from a mobile device to the projector. Equipped with an easy-to-use network management system that lets you remotely control up to 256 LightStream projectors, the PJD6350 is great for use in multiple classrooms across an entire campus, or multiple meeting rooms in an office building!

Key Features:

SuperColor™ technology delivers superior, richer colors

Smart design includes PortAll™ MHL/HDMI compartment, tactile keypad, top lamp door, and cable management system

Easy remote network management of up to 256 LightStream projectors

Dual 3D Blu-ray ready HDMI inputs

Flexible setup options include 1.3x optical zoom, keystone correction, corner adjustment, 1.51 short throw ratio

Designed for:

Education


Business

LightStream™ XGA 1024x768 Networkable Projector



PJD6350

Projection Distance		Screen Size (4:3) Diagonal	
Inches	Meters	Inches	Meters
36-47	0.9-1.2	30	0.8
48-63	1.2-1.6	40	1.0
61-79	1.5-2.0	50	1.3
73-94	1.8-2.4	60	1.5
85-110	2.2-2.8	70	1.8
97-126	2.5-3.2	80	2.0
109-142	2.8-3.6	90	2.3
121-157	3.1-4.0	100	2.5
145-189	3.7-4.8	120	3.0
182-236	4.6-6.0	150	3.8
242-315	6.2-8.0	200	5.1
303-394	7.7-10.0	250	6.4
363-472	9.2-12.0	300	7.6

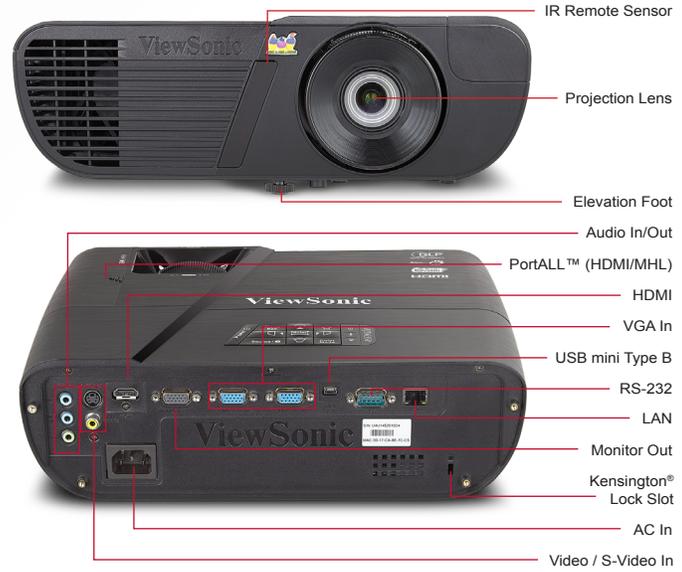

Specifications

DISPLAY	Type	0.55" Digital Micromirror Device (DLP™)
	Resolution	1024 x 768 (native)
	Lens	1.3x manual optical zoom / manual optical focus
	Keystone	Vertical (± 30°) / Horizontal (± 30°)
	Size	30 – 300 in. / 0.76 – 7.62 m (diagonal)
	Throw Distance	3.9 – 36.1 ft. / 1.2 – 11.0 m
	Throw Ratio	1.51~1.97:1
	Lamp	190 watt
	Light Life	5000 / 6000 / 10000 hours* (Normal / Eco-mode / DynamicEco™ Mode)
	Brightness	3300 lm
	Contrast Ratio	20,000:1 (DynamicEco mode)
Aspect Ratio	4:3 (native), 16:9	
Color Depth	30 bits, 1.07B Color (10+10+10)	
INPUT SIGNAL	Computer and Video	NTSC M(3.58MHz), 4.43MHz, PAL (B, D, G, H, I, M, N, 60), SECAM (B, D, G, L, L1), SD 480i and 576i, ED 480p and 576p, HD 720p, 1080i, 1080p
	Frequency	Fh: 15–102KHz, Fv: 23–120Hz
COMPATIBILITY	PC	Up to 1600x1200
	Mac®	Up to 1600x1200 (may require MAC adapter)
CONNECTOR	Digital Input	HDMI 1.4 (x1) / HDMI/MHL (x1)
	RGB Input	15-pin mini D-Sub (x2)
	Composite Input	RCA jack (x1)
	S-Video	Mini-Din 4 pin (x1)
	Audio In	3.5mm mini jack (x2)
	Audio Out	3.5mm mini jack (x1)
	Video Out	15-pin mini D-Sub (x1)
	LAN	RJ45 (x1)
	USB	Mini type B (mouse control and maintenance)
	Control	RS232

AUDIO	Speaker	10W (x1)
NOISE LEVEL	Normal / Eco-mode	32 dB / 27 dB
POWER	Voltage	100~240VAC (Auto Switching), 50-60Hz (universal)
	Consumption	315W (max) / <0.5W (stand-by mode)
CONTROLS	Basic	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source
	OSD	Display, Picture, Source, System Setup (Basic), System Setup (Advanced), Information (See user guide for full OSD functionality)
OPERATING CONDITIONS	Temperature	32–104° F (0–40° C)
	Humidity	10–90% (non-condensing)
	Altitude	0–40,000 ft (12,192m)
DIMENSIONS (W x H x D)	Physical	12.44 x 4.08 x 8.98 in. / 316 x 103.7 x 228 mm
	Packaging	16.0 x 8.85 x 17.72 in. / 410 x 225 x 450 mm
WEIGHT	Net	4.9 lb. / 2.2 kg
	Gross	8.8 lb. / 4.0 kg
REGULATIONS		CB, TUV-GS, UL/cUL, FCC (including ICES-003), CE, C-Tick, Mexico Energy, EAC, UkrSEPRO/EMC DOC, UL COC, TUV-S, PSB, KCC, KC, SASO, CCC, WEEE, RoHS, REACH, SVHC, ERP
WARRANTY		3-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service**

Optional Accessories

Wireless Presentation Gateway	WPG-370
Wireless Presentation Gateway Dongle	WPG-300
3D Active Shutter Glasses.....	PGD-350
Ceiling Mount Kit	WMK-005
Cable Management.....	PJ-CM-001
Carrying Case.....	PJ-CASE-008

What's in the box?

PJD6350 projector, power cable, VGA cable, remote control (with laser) with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

*Lamp life may vary based on actual usage and other factors. **One year Express Exchange® service requires product registration. Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies, DLP™ and DLP logo are registered trademarks of Texas Instruments. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Copyright © 2015 ViewSonic Corporation. All rights reserved. [17697-02B-03/15]

www.viewsonic.com