

MULTIMEDIA PROJECTOR DS325



SUPERIOR PRESENTATION PERFORMANCE



Designed to deliver large, clear, easy to read text with exceptional color reproduction at its native resolution



3D Ready for the most amazing, most immersive viewing experience



Outstanding performance you can depend on



Advanced energy saving features to reduce the cost of operation



Easy to operate



Full 3D



The Optoma DS325 is a remarkably bright, easy-to-use, feature rich DLP® projector, designed to provide outstanding performance whether on the road or at the office. With its 2800 ANSI lumens and 10,000:1 contrast ratio, the Optoma DS325 will captivate your audience by delivering bright, sharp, color rich graphics and video.

The Optoma DS325 offers the level of connectivity you need and its intuitive menu makes it incredibly easy to operate, allowing you to fully concentrate on delivering your very best presentation.

Reliable and economical, it features the latest Optoma Eco+ technology for ultra long lamp life. Its DLP technology, along with Optoma's commitment to quality, ensures your projector will provide years of carefree operation.

CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART PHONES



TABLETS



3D BLU-RAY/DVD PLAYERS

SET TOP BOXES



CAMCORDERS



GAME CONSOLES



DIGITAL CAMERAS

MULTIMEDIA PROJECTOR — DS325

OPTICAL/TECHNICAL SPECIFICATIONS


Display Technology	Single 0.55" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	SVGA (800 x 600)
Maximum Resolution	VGA: UXGA (1600 x 1200)
Brightness	2800 ANSI lumens
Contrast Ratio	(TBC) 10,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	6500/6000/4500 Hours (ECO+/ECO/normal) 190W Philips
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>85%
Offset	114%
Aspect Ratio	4:3 Native, 16:9 and 16:10 compatible
Throw Ratio (distance/Width)	1.9–2.17
Projection Distance	3.2'–32.8' (1–10 m)
Image Size (Diagonal)	22.9'–300" (0.58–7.62 m)
Projection Lens	F=2.41–2.55, f=21.8–24 mm 1.1x manual zoom and focus
Digital Zoom	0.8 ~ 2.0
Noise Level (Normal/Bright)	(TBC) 27dB/29dB
Remote Control	IR remote mouse
Operating Temperature	41–113°F (5–45°C), 85% max humidity
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 255W (Normal), Min 207W (Eco+), <0.5W (standby-ECO)

COMPATIBILITY SPECIFICATIONS

Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Frame sequential, side by side and top/bottom format
Vertical Scan Rate	24–85Hz, 120Hz
Horizontal Scan Rate	15.375–91.146KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
I/O Connection Ports	VGA-in, S-video, composite video, RS-232

PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar & keypad lock
Weight	5 lb (2.27 kg)
Dimensions (W x H x D)	11.28" x 3.98" x 7.6"

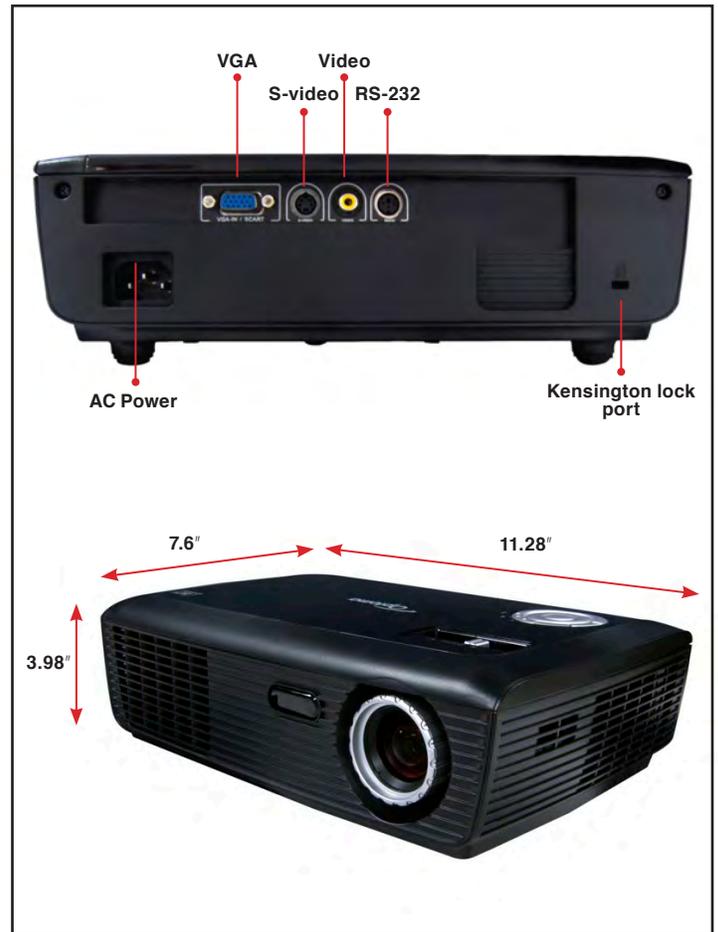

Warranty

1-Year Limited Parts and Labor, 90-Days on Lamp

In the Box (Standard Accessories)

AC power cord, VGA to VGA cable, remote control, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

Ceiling mount, component to VGA cable, composite video cable, RS-232 cable, S-video cable, Optoma screens and DLP® Link™ 3D glasses

Accessory Part Numbers

Lamp: BL-FP190A Mount: BM-500IU
Remote: BR-3066N DLP® Link™ 3D glasses: ZD301

UPC: 796435 41 847 2

*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with active LCD shutter glasses or RF glasses when projector is used with compatible 3D player. Please visit www.Optoma.com for more information.