

Laser Projector

Specifications		
Model name	MP-WU5603	MP-WU5503
Display system	3LCD	
Display device	Size of effective display area: 0.64", aspect ratio 16:10 Number of pixels: 2,304,000 pixels (1,920 horizontal × 1,200 vertical)	
Lens	Zoom: Manual (1.7x) Focus: Manual Lens shift: Manual (V: 0 ~ +56.5%, H: ±4.6%)	
Light source	Laser diode	
Screen size	30 ~ 300 inch	
Light output (Brightness)*1	6,000 lm	5,000 lm
Contrast ratio (full white / full black)*2	1,500,000:1	
Speaker	16 W × 1 mono	
Displayable scanning frequency	Horizontal: 15 ~ 106 kHz Vertical: 24 ~ 120 Hz	
Display Resolution	Computer: VGA, SVGA, XGA, WXGA, WXGA+, SXGA, WSXGA+, UXGA, Full HD, Mac 16", WUXGA*3 Video: NTSC, NTSC4.43, PAL, SECAM, PAL-M, PAL-N, PAL60 Hz, 480p@60, 576i@50, 576p@50, 720p@50/60, 1080i@50/60, 1080p@50/60, 4K × 2K(3840 × 2160)@24/25/30*4, 4K × 2K(4096 × 2160)@24/25/30*4	
Terminals	HDMI IN: HDMI connector × 2 COMPUTER IN 1: Mini D-sub 15-pin connector × 1 COMPUTER IN 2 / MONITOR OUT: Mini D-sub 15-pin connector × 1 VIDEO IN: RCA connector × 1 HDBaseT: RJ-45 connector × 1 AUDIO IN: 3.5mm stereo mini connector × 2, RCA connector (L, R) × 1 AUDIO OUT: 3.5mm stereo mini connector × 1 CONTROL IN (RS-232C): D-sub 9-pin connector × 1 LAN: RJ-45 connector × 1 WIRELESS: USB type A × 1 (wireless adapter (option))	
Network	Wired: 100BASE-TX / 10BASE-T Wireless (Option*5): IEEE 802.11a/b/g/n/ac	
Operating temperature	0 ~ 40 °C*6 (The brightness of light source may be reduced automatically over 35 °C)	
Operating humidity	10 - 80%RH (non-condensing)	
Power requirements	AC 100 V - 120 V (50 / 60 Hz): 4.3 A AC 220 V - 240 V (50 / 60 Hz): 2.1 A	AC 100 V - 120 V (50 / 60 Hz): 3.8 A AC 220 V - 240 V (50 / 60 Hz): 1.9 A
Power consumption	AC 100 V - 120 V (50 / 60 Hz): 420 W AC 220 V - 240 V (50 / 60 Hz): 400 W	AC 100 V - 120 V (50 / 60 Hz): 370 W AC 220 V - 240 V (50 / 60 Hz): 360 W
Standby mode power consumption	Less than 0.5 W at saving mode*7	
Standard outside dimensions (W × H × D)	512 mm × 154 mm × 424 mm (20.2" × 6.1" × 16.7") (Including protruding parts) 506 mm × 136 mm × 424 mm (19.9" × 5.4" × 16.7") (Excluding protruding parts)	
Weight	Approx. 8.5 kg (18.7 lbs.) Approx. 8.2 kg (18.1 lbs.)	
Accessories	Remote control with two AA batteries, Power cord, Computer cable, User's manual, Security label, Lens cover, Hook metal, Screw, HDMI cable holder, Cable tie	
Optional parts	USB wireless adapter: USB-WL-5G*8 Air filter: UX43581 Mounting accessories: HAS-9110 (Bracket for fixing mount), HAS-104S (Slim adapter for fixing mount), HAS-204L (Standard adapter for fixing mount), HAS-304H (Long adapter for fixing mount)	

*1: When PICTURE MODE is set to DYNAMIC, DYNAMIC BLACK is OFF and LIGHT OUTPUT is set to Normal 100 %.
*2: When PICTURE MODE is set to DYNAMIC, DYNAMIC BLACK is ON and LIGHT OUTPUT is set to Normal 100 %.
*3: WUXGA (60 Hz) Reduced Blanking only.
*4: Only for HDMI1 and HDBaseT.
*5: Optional wireless adapter is needed.
*6: 0 - 40 °C at altitude from 0 m to 1,600 m, 0 - 35 °C at altitude from 1,600 m to 3,048 m.
*7: SAVING mode disables the functions of MONITOR OUT, AUDIO OUT, speaker sound, network communication, RS-232C control except POWER ON command, etc. in standby.
*8: The availability of the USB-WL-5G varies depending on the country and the region.

Environment

- ▶ Compliance with EU Directive RoHS*1
- ▶ Power saving mode engaged during standby
- ▶ Long Life mode
- ▶ No use of mercury lamp


*1: RoHS is the acronym of "Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment."

—Design and specifications are subject to change without notice.



• The projected images and comparison photos in this catalog are simulations. • LCD panels, polarizers and other optical components and cooling fans may need replacement after prolonged usage. For more details, please consult a sales representative. • Do not use in places where there is a lot of water, dampness, steam, dust, soot or tobacco smoke. This may result in fire or malfunction. • Optical components (light source, LCD panel, polarizing plate, PBS [polarizer beam splitter]) have limited service lives. They must be repaired or replaced if they are used for a long period of time. • During use and immediately after use, do not touch anywhere near the vents as these parts are extremely hot. • Optical components other than the light source: If the projector is used for six hours or more per day, they may need to be replaced in less than a year. • LCD panel: If the projector is used continuously for six hours or more, its replacement cycle may be shortened.

• Each product may have differences of colors brightness and focus due to manufacture variation. • Blu-ray Disc™ and Blu-ray™ are trademarks of Blu-ray Disc Association. • Crestron® and Crestron RoomView® are registered trademarks of Crestron Electronics, Inc. in the United States and other countries. • DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. • HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. • HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. • Extron® is registered trademark of RGB Systems, Incorporated. • All other trademarks are the properties of their respective owners.

Dimensions

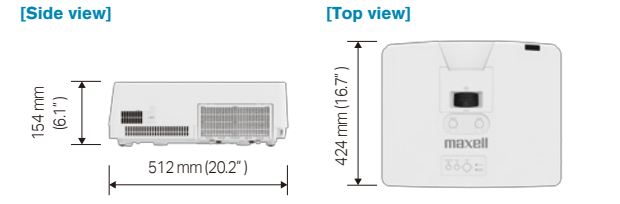

Projection Distance

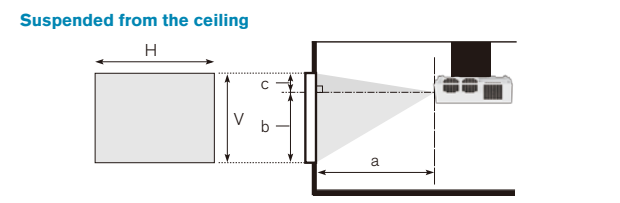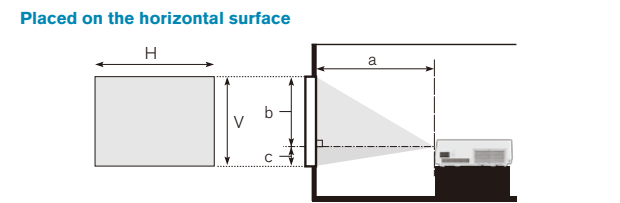


H × V : Screen size
a : Projection distance (from the projector's front panel to screen. Tolerance ±10%)
b : Screen height from lens center to top (when installed on a horizontal surface)
c : Screen height from lens center to bottom (when installed on a horizontal surface)

*The figures above are not drawn to scale.

MP-WU5603, MP-WU5503 16 : 10 screen (1,920 × 1,200) (±10%)

Screen type	Screen size		Projection distance		Lens shift bottom side max.		Lens shift top side max.	
	H	V	a (min.)	a (max.)	b	c	b	c
60	1.3	0.8	1.7	3.0	40	16	86	34
80	1.7	1.1	2.3	4.1	54	21	115	45
100	2.2	1.5	2.9	5.1	67	26	143	56
120	2.6	1.6	3.6	6.2	81	32	172	68
150	3.2	2.0	4.5	7.8	101	40	215	85
200	4.3	2.7	6.0	10.4	135	53	287	113

Terminals

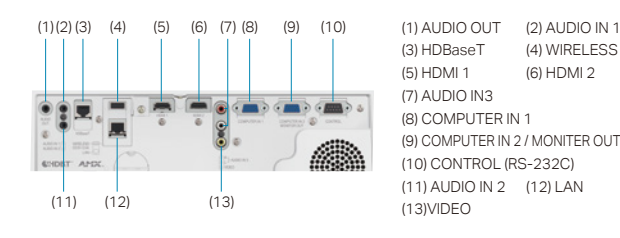

High resolution and low noise laser projector, suitable for use in lecture rooms and mid-sized conference rooms



*Projected images are simulations



High Reliability and Stability


Long Life 20,000 hour Laser Light Source

Maxell's laser light source projectors have 20,000 hours*1 of light source life. Use for 50,000 hours*1 can be achieved in LONG LIFE 2 mode. Also, users may select their desired operation mode.

Furthermore, in addition to the light source, the phosphor wheel is also dust resistant, suppressing brightness level reduction by preventing dust from coming into contact with the optical parts.

Users can enjoy using the projector for long periods of time while maintaining its brightness. Additionally, though the device is a 5,000 lm projector, it has achieved a low noise of 32 dB. This is an optimal feature for presentations and seminars.


*1 For laser light source. The value is an estimate and may vary depending on the use environment or use condition.

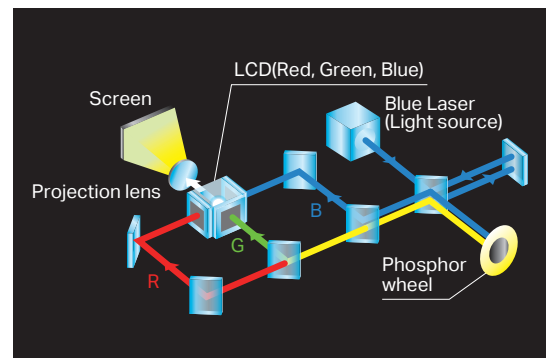

LIGHT OUTPUT	Brightness*2		Light source life*3	Noise*4	
	MP-WU5603	MP-WU5503		MP-WU5603	MC-WU5503
NOMAL	6,000 lm	5,000 lm	20,000 hours		
LONG LIFE 1	4,200 lm	3,750 lm	30,000 hours	36 dB	32 dB
LONG LIFE 2	3,000 lm	2,500 lm	50,000 hours		
WHISPER	3,000 lm	2,500 lm	20,000 hours	27 dB	

*2 These are reference values and may vary depending on products. *3 The values are an estimate and may vary depending on the usage environment or use condition. *4 Reference values when used in an ambient temperature of 23 °C. The noise level varies by the projector model, installation environment, and use condition.


Brightness Deterioration Comparison between Light Output Modes

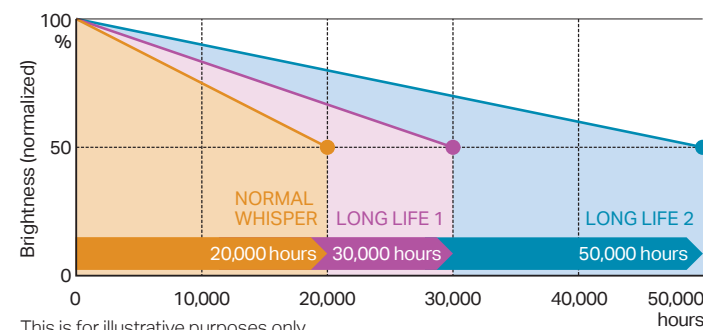

Hybrid Filter

Hybrid Filter requires less frequent maintenance and cleaning, making 20,000 hours of operation possible*5.

*5 This is an estimate of the acceleration test performed under the condition of 50mg/m³ suspension dust concentration using JIS (Japanese Industrial Standards) standard powder. Cleaning intervals vary depending on the use environment.

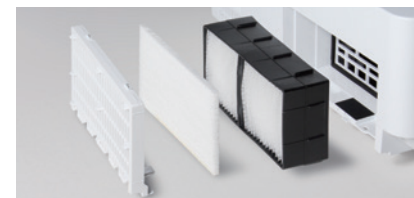


High Image Quality

ACCENTUALIZER and HDCR

ACCENTUALIZER makes pictures look more real by enhancing shade, sharpness, and gloss to make pictures clearer. The HDCR function corrects blurred images caused by room lighting or outside light sources, and creates an effect similar to increasing contrast resulting in clear images even in bright rooms.

* Comparison photos are simulations.

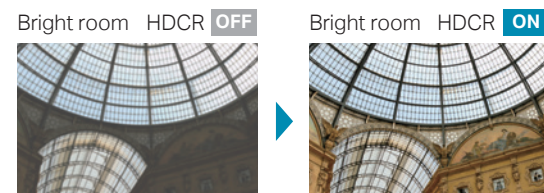

LINE UP

MP-WU5603

WUXGA 6,000 lm



MP-WU5503

WUXGA 5,000 lm




Local availability may be limited.

Installability

Lens shift and zoom lens

Featuring a powerful 1.7x manual zoom lens, the projectors allow for a greater range of installation possibilities. Manually shift the lens horizontally and vertically to position the image on the screen without causing keystone distortion.

*The figure are not drawn to scale.

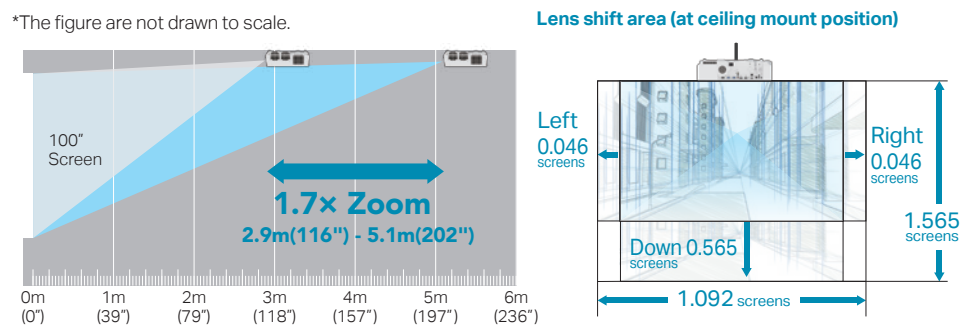

360° Projection


This projector provides great installation flexibility as it can be installed at various angle. By rotating the projector 90 degrees, you can project vertically long images (Portrait Projection).



Convenient Functions

Digital Connectivity

Equipped the HDBaseT™ and 2 HDMI input terminals. HDBaseT input, capable of transmitting signals switch no image degradation using a standard LAN cable (Cat5e or higher, shielded type) of up to approx. 100 m.

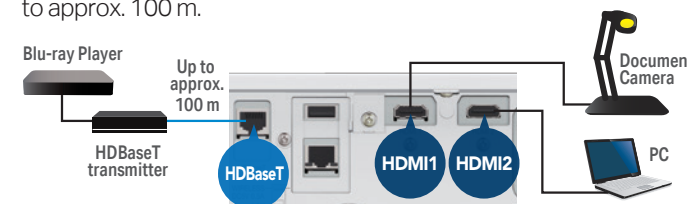

PbyP and PinP *6

You can simultaneously display 2 different picture signals in both the main area and sub area. In PbyP, displayed in the display size ratio. In PinP, the sub area position can be changed. This can be used when comparing documents and for discussions.




*6 The function is not available depending on combination of input signals.

Quick Start *7

When STAND BY MODE is set to QUICK START, projection starts within 1 second*8 of turning on. You can use to start presentation and class quickly.


*7 The standby power consumption of the mode is higher than the other modes. *8 QUICK START is disabled in 30 minutes and the mode operating to same as NORMAL.

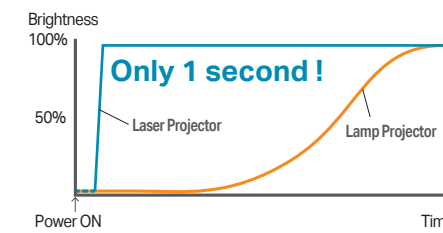

This is for illustrative purposes only.

Auto Power ON *9

The projector can turn the power on to display the input image automatically when the input signal comes from connected devices.

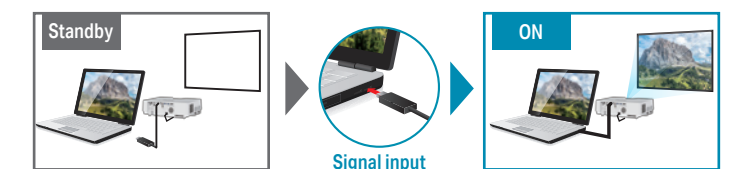

*9 Supported terminal are COMPUTER IN 1, HDMI 2 and VIDEO. This function is unavailable when STANDBY MODE is set to WOL or SAVING. This function may work unintentionally by connected external device.

Other Functions

• Easy Schedule Setting • DICOM® Simulation Mode*10 • 16W Internal Speaker • Smart Device Control & Monitoring*11 • Moderator Control Mode*12 • PIN lock • Key lock • Projector cloning setup application*13

*10 This projector is not a medical device and is not compliant to the DICOM standard, and neither the projector nor this function should be used for medical diagnosis. *11 To use Smart Device Control, an exclusive application, "PJ Quick Connection" is required. Visit to the maxell projector web site. http://biz.maxell.com/en/display_equipment/ *12 To use Smart Device Control, an exclusive application, "LiveViewer" is required. Visit to the maxell projector web site. http://biz.maxell.com/en/display_equipment/ This function is for Windows users only. *13 To use, an exclusive application, "Projector Data Cloning Application" is required. Visit to the maxell projector web site. http://biz.maxell.com/en/display_equipment/