

HT9060 DLP® Digital Projector


HT9060 Features

- True 4K UHD with Razor-Sharp 8.3 Million Pixels Detail
- Superb Cinematic Color DCI-P3 Color Accuracy for Unmatched Digital Cinema Experience
- HDR-PRO™: Hyper-Realistic Video Quality with HDR
- Distinct Clarity without Artifacts from Panel Misalignment
- Philips ColorSpark HLD LED technology
- H/V Lens Shift & Big Zoom Lens for Installation Flexibility
- 4K Auto-upscaling from 1080p Signal



Connectivity

- PC (D-Sub) x 1
- HDMI x 2
- USB (Type mini B) x 1 (Service)
- LAN x 1
- RS232 x 1
- DC 12V Trigger x 2
- IR Receiver x 2 (Front & Back)
- IR in x 1

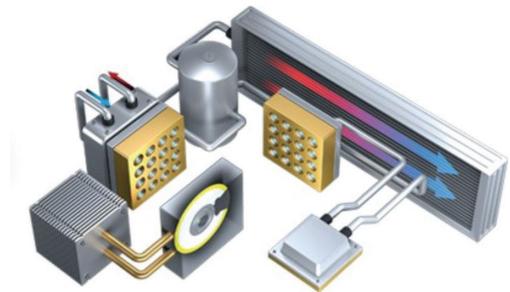

BenQ's IP5X Rated
Dust Free Laser

SPECIFICATIONS		HT9060	
DISPLAY	Projection System	DLP 4K UHD	
	Resolution	3840 x 2160 with XPR technology	
	Display Pixels	8.3 million pixels	
	Brightness	2200 AL	
	FOFO Contrast Ratio	50,000:1	
	Display Color	1.07 Billion Colors	
	Aspect Ratio	16:9	
OPTICAL	Lens	F = 2.05 - 2.37 f = 20.54 - 30.31	
	Throw Ratio	1.36 - 2.03 (100" @ 3m)	
	Image Size (Clear Focus / Maximum)	95"~180" / 300"	
	Zoom Ratio	1.5:1	
	Lamp Type	PHILIPS HLD	
	Lamp Mode (Normal/Eco)*	20,000 hours**	
	Lens Shift	Vertical: ± 65% / Horizontal: ± 27%	
AUDIO	Audible Noise (Normal/Economic mode)	31 / 23 dBA (under silence mode)	
SPECIAL FEATURE	Color Space	DCI-P3	
	Color Wheel Speed	1x (120 Hz)	
COMPATIBILITY	HDTV Compatibility	VGA (640 x 480) to 4K UHD (3840 x 2160)	
	Video Compatibility	480i/p 60Hz, 576i/p 50Hz, 720p 50/60Hz, 1080i 50/60Hz, 1080p 24/25/30/50/60Hz, 2160p 24/25/30/50/60Hz	
	Horizontal Frequency	15 - 102KHz	
	Vertical Scan Rate	23 - 120Hz	
POWER	Standby Power consumption	Normal 530W, Eco 290W, Network Standby <3W, Standby <0.5W	
	Power Supply	AC100 to 240 V, 50 to 60 Hz	
DIMENSION AND WEIGHT	Product Dimensions (WxHxD)	470.7 x 224.9 x 564.7 mm	
	Product Weight	18.5 Kg (40.8 lbs)	
PICTURE MODES	ISF Disabled**	Bright / Vivid / Cinema / DCI-P3 / Game / User 1 / User 2	
	ISF Enabled***	Bright / Vivid / Cinema / DCI-P3 / Game / User 1 / User 2 / ISF Night / ISF Day	
OSD	On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
ACCESSORIES	STANDARD	OPTIONAL	
	Lens Cover Remote Control with Battery Power Cord (by region) User Manual CD Quick Start Guide Warranty Card	Spare Lamp Kit Ceiling Mount / 5J.JFY10.001 Anamorphic lens	

ENVIRONMENT NOTICE: Lamp in this product contains mercury. To dispose of the product or used lamps, consult your local environment authorities for regulations or see www.lamprecycle.org.

* ColorSpark is a trademark of Philips Lighting Holding B.V.

** Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

*** Default picture mode is DCI-P3.

**** When ISF is enable, default picture mode is ISF Night.



- PC (D-Sub) x 1
- HDMI x 2
- USB (Type mini B) x 1 (Service)
- LAN x 1
- RS232 x 1
- DC 12V Trigger x 2
- IR Receiver x 2 (Front & Back)
- IR in x 1

BenQ America Corp.
www.BenQ.us

BenQ is a registered trademark of BenQ Corp. All rights reserved. Product names, logos, brands and other trademarks featured or referred to in this material are the property of their respective trademark holders. Specifications subject to change without notice.



Because it matters