




## ImagePro 8778 Portable DLP Projector

- Filterless DLP™ Technology
- 2000 Lumens Brightness
- XGA Resolution
- 2000:1 Contrast Ratio
- Portable, Only 7.6 lbs.
- Full Connectivity with 3 Video and 2 Computer Inputs
- Vertical Keystone Correction
- Quiet Operation
- Manual Zoom & Focus
- Monitor Loopthrough & Remote Mouse Control

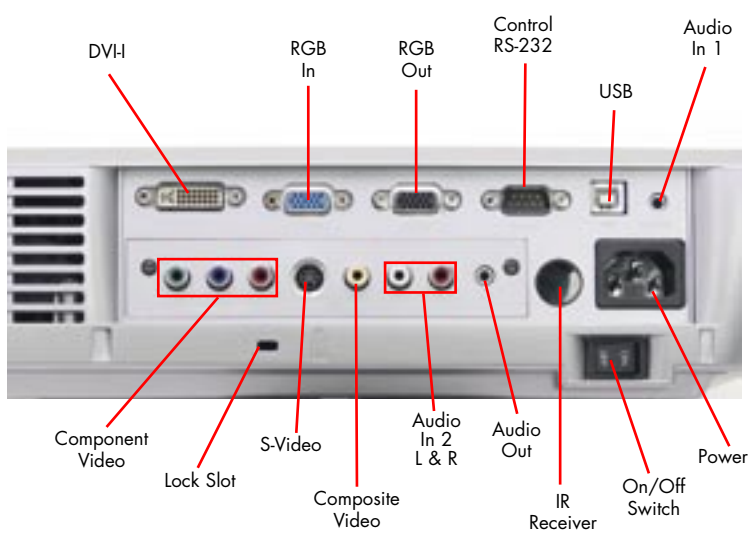

# 8778 DUKANE

# ImagePro 8778 Portable DLP projector

The Dukane ImagePro™ 8778 is an affordable full featured projector that is ideal for most classrooms or conference rooms. 2000 lumens, assures you the a clean bright image.

This full-featured DLP projector has outstanding video and computer images. It has full XGA resolution (1024 x 768) and very low maintenance requirements.



## Key features:

- 2000 Lumens Brightness
- XGA Resolution
- DLP™ Technology, Filterless System
- 2000:1 Contrast Ratio
- Full Connectivity with 3 Video and 2 Computer Inputs
- Monitor Loophrough & Remote Mouse Control
- Vertical Keystone Correction
- Quiet 31dB Operation
- Manual Zoom & Focus
- Three Year Warranty and One Year Peace of Mind Service

## 8778 Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	3.3	4.0
40	32	4.4	5.3
60	48	6.6	8.0
80	64	8.7	10.7
100	80	10.9	13.3
200	160	21.9	26.7
250	200	27.3	33.3

Throw Ratio (distance to width) 1.64 2.0

# DUKANE

Audio Visual Products  
2900 Dukane Drive  
St. Charles, Illinois 60174  
www.dukcorp.com/av



Toll-free: 800-676-2485  
Fax: 630-584-5156  
E-mail: avsales@dukcorp.com

## Specifications

Image Element	0.55" 12 degree DDR DLP
Brightness	2000 ANSI lumens 1500 (whisper mode)
Resolution	1024 x 768 pixels (H X V), XGA
Contrast	2000:1
Scanning Frequency	fh 15, 31-90 kHz, fv 50-85 Hz
Lens	Manual zoom, (18.6-22.7mm), 1.22x
Lens Throw Ratio	1.6 - 2.0 :1 throw distance to image width
Keystone Correction	Digital vertical +/-15 deg.
Aspect Ratio	4:3 native, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA, SXGA, and MAC
Video Compatibility	NTSC, NTSC 4.43, PAL B/G/H/I/M/ N 60, SECAM, HDTV 1080i, 720p, 480i/p
Mouse Control	USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	200W VIP
Lamp Life	2000 hours (4000 hours Whisper Mode)
Audio	2W x 1
Throw Distance	40" to 400"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Component, RCA x 3 (1) S-video, Min DIN 4-pin, (1) Composite video, RCA x 1 Audio, Stereo RCA x 2 (L&R)
Inputs, Computer	(1) RGB Signal: D-sub, 15 pin (1) DVI-I, Audio, Stereo mini jack x 1
Outputs Monitor	15 pin, D-sub
Outputs Audio	Audio, Stereo mini jack x 1
Outputs, Control	9 pin DB Connector RS232, USB Type A
Security	Kensington slot
Fan Level	36dB, (31dB in whisper mode)
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 110-240V (auto ranging), 50/60 Hz, 290W (<10W Standby)
Size (WxHxD)	12.9" x 3.5" x 9.4"
Weight	7.8 lbs.
Carton Size	21" x 14" x 19"
Shipping Weight	20 lbs.
Accessories Included	Remote control, batteries (AA), power cord, Computer Cable (DVI-RGB), USB Cable, S-Video Cable, CDROM, Soft Carry Case, User Manual
Safety	FCC-B, UL/Cul, TUV, CB, CE, CCC
Optional Accessories	Lamp 456-8778; Ceiling mount, universal, RPA-U

## Three (3) year limited warranty

on parts and labor in North America, lamp excluded (for other locations, local warranties apply).  
Includes Dukane's FREE 1 year  
Peace-of-Mind Loaner Program.

# 3YR