

Convenient and easy to use installation projector with advanced technology and 5,500 ANSI lumens brightness in a low profile design.



Key Features

- WXGA 1280 x 800 resolution
- 5,500 ANSI lumens white/color output
- 16 watt audio output
- 3000:1 contrast ratio
- HDMI 2 inputs
- 20,000 hours hybrid filter*
- 3,000 hours lamp life (Eco mode)**
- Picture by Picture




Hitachi's installation-friendly CP-WX8255A LCD projector is designed to provide maximum presentation impact in mid to large venue applications. It offers a versatile array of innovative, performance-enhancing features along with advanced video display technology providing bold, brilliant colors with incredible image clarity and uniformity. Plus, with motorized zoom, focus and superior lens shift, and a variety of lens options, the CP-WX8255A is at the top of its class when it comes to installation flexibility. All this, and with a lower cost of ownership. For added peace of mind, Hitachi's CP-WX8255A is also backed by a generous warranty and our world-class service and support programs.

CP-WX8255A

UNIQUE FEATURES

Center Lens Design



This feature makes it easy to align the projector with the center of the screen for faster and trouble-free setup.

DICOM® Simulation Mode



Images in DICOM (Digital Imaging and Communications in Medicine) Mode are reproduced with an advanced grayscale level. This mode is ideal for viewing grayscale medical images such as X-rays, and for training and educational purposes.

These projectors are not approved medical devices. They should not be used for actual medical diagnosis.

Motorized Zoom, Focus and Lens Shift Control



Allows for greater range of installation possibilities. With the motorized function you can make fine adjustments through the remote control or RS232/IP device.

Multiple Lens Options



In addition to the one ML703 middle throw standard lens, four optional lenses are available: FL701 fixed; SL702 short throw; LL704 long throw; and UL705 ultra-long throw.

Perfect Fit 2



Enables the user to adjust individual corners and sides independent of one another. Perfect Fit 2 provides vertical and horizontal digital correction of either barrel or pin cushion distortions. This feature helps correct geometric and complicated distortions. Perfect Fit 2 allows the projected image to fit correctly to the screen quickly and easily.

Picture By Picture



Enables the content from two input sources to be displayed simultaneously, side by side on one screen. You can use any two sources including 2 HDMI, with both images sharing equal screen size. The feature is ideal for teleconferencing applications.

360° Rotation



Display rotation of 360° for creative applications and greater installation flexibility.

Status Monitor



With Hitachi's status monitor, you'll have access in real time to projector diagnostics. Status updates include configuration information, maintenance history, as well as error and alarm messaging. For even greater user convenience, the status monitor can be accessed on the rear input panel or through the Hitachi network tools software.



STANDARD FEATURES

MyButton



Four customizable buttons on the remote control allow users to create a shortcut for projector functions such as Information, Auto Keystone, Picture Mode etc.

Network Control, Maintenance and Security



Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, image transfer and e-mail alerts for reactive and routine maintenance.

PC-Less Presentation



By using a USB memory stick or other storage device, you can use the projector without a computer. Menus are easy to see with a thumbnail display. Additionally there is also a slideshow function.

PJMessenger



PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send announcements out to multiple units.

Present Content via LAN



Hitachi's suite of networking software allows you to easily send content directly from your PC to the projector via your LAN connection.

Wireless Presentation Ready



You can use a wireless network by connecting the projector to a computer using the optional USB wireless adapter part number USBWL11N. The adapter supports IEEE802.11b/g and the latest 11n.

CP-WX8255A LCD Projector

HITACHI
Inspire the Next

Quality, reliability and installation convenience.

From mid-size to very large auditoriums and conference halls, Hitachi's CP-WX8255A LCD projector is the perfect solution. With 5,500 ANSI lumens brightness and WXGA 1280 x 800 resolution, the CP-WX8255A will deliver dynamic images guaranteed to dazzle any audience. Incorporating Hitachi's leading-edge technology, the CP-WX8255A features high contrast ratio, long lamp life, a variety of lens options to accommodate your specific application, and is wireless presentation ready.



Plus, embedded networking gives you the ability to manage and control multiple projectors over your LAN (scheduling of events, centralized reporting, image transfer, and e-mail alerts). Even with the array of advanced features, Hitachi's CP-WX8255A is designed for user-friendly operation and installation convenience.



Front 3/4 View



Top View




Side Profile



Rear View

Input/Outputs

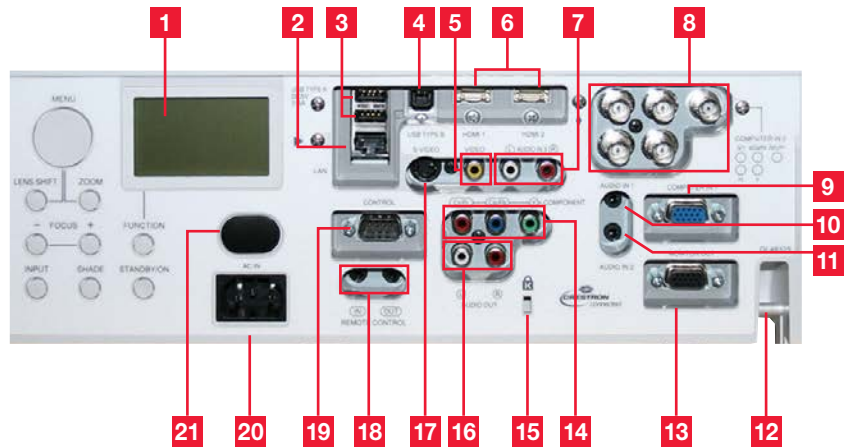

- | | | |
|--------------------|------------------|-----------------------|
| 1. Status Monitor | 8. Computer in 2 | 15. Kensington Lock |
| 2. LAN | 9. Computer in 1 | 16. Audio Out |
| 3. USB Type A x 2 | 10. Audio in 1 | 17. S-Video |
| 4. USB Type B | 11. Audio in 2 | 18. Remote Control |
| 5. Composite Video | 12. Security Bar | 19. Control (RS-232C) |
| 6. HDMI x 2 | 13. Monitor Out | 20. AC Inlet |
| 7. Audio in 3 | 14. Component | 21. Remote Sensor |



3LCD Technology



Closed Captioning



Crestron Integrated Partner



AMX Device Discovery



Hitachi Trade-Up Program



3 Year Warranty

HDMI HDMI

HI0150-Rev.1-07/13
All specifications subject to change without notice.
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.
©2013 Hitachi America, Ltd. All Rights Reserved.

Hitachi America, Ltd.

900 Hitachi Way, Chula Vista, CA 91914
Toll Free: 1.800.HITACHI • Email: dmd.info@hal.hitachi.com
Web: hitachi-america.us/projectors

CP-WX8255A



Accessories and Lenses

Supplied Accessories	Remote control, power cord, computer cable, one standard ML703 lens, lens cover, user's manual, security label, application CD, adapter cover
Optional Accessories	USBWL11N USB wireless adapter, MS-1 wired multifunction switcher, MS-1WL wireless multifunction switcher
Optional Lenses	4 optional lenses are available: FL701, SL702, LL704, UL705
Replacement Parts	
Lamp	DT01291
Remote Control	HL02801
Filter	UX38241

Projection Throw Chart

Screen Size 16:10		Throw Distance	
Diagonal	Width	Min	Max
30	25	39	78
60	51	78	154
80	68	104	206
100	85	129	257
150	127	194	385
200	170	259	513
250	212	323	641
300	254	388	769

Throw Ratio: 1.5 - 3.0 : 1 (distance : width)
Screen size and throw distance are measured in inches with standard lens ML703.

Projection Lens Chart

Lens	Inches	Meters
ML703	129 - 257	3.3 - 6.5
FL701	71	1.8
SL702	102 - 154	2.6 - 3.9
LL704	244 - 415	6.2 - 10.5
UL705	415 - 705	10.5 - 17.9

Projection distances measured in inches and meters with standard lens and optional lenses when projecting onto a 100" diagonal screen.

Specifications

Display	Projection Technology	3LCD, 3 chip technology
	Resolution	WXGA 1280 x 800
	White Light Output	5,500 ANSI lumens
	Color Light Output	5,500 ANSI lumens
	Colors	16.7 million colors
	Aspect Ratio	Native 16:10 and 4:3 / 16:9 compatible
Lens & Operation	Contrast Ratio	3000 : 1 (using active IRIS)
	Throw Ratio (distance : width)	1.5 - 3.0:1 (with standard lens)
	Lens	F = 1.6 - 2.9, f = 24 - 48 mm x 2.0 motorized zoom, focus & lens shift
	Lamp Wattage	330W
	Expected Lamp Life*	Approximately 2,500 hours (standard mode) 3,000 hours (Eco mode)
	Expected Filter Life**	Approximately 20,000 hours
	Speaker Output	16W (8W x 2)
	Acoustic Noise Level	37 dB (31 dB in Eco mode)
Compatibility	Keystone	H and V: +/- 35° (with standard lens)
	Computer	VGA, SVGA, XGA, WXGA, WXGA+/SXGA/WSXGA+/UXGA (compressed), MAC 16"
	H-Sync	31.5 kHz - 106 kHz
	V-Sync	56 Hz - 120 Hz
	Composite Video	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
Connectors	Component Video	480i, 480p, 576i, 720p, 1080i, 1080p
	HDMI	480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDS clock 27 MHz - 150 MHz
	Digital Input	HDMI x 2 (HDCP compliant)
	Computer Input 1	15-pin mini D-sub x 1
	Computer Input 2	BNC x 5
	Computer Monitor Output	15-pin mini D-sub x 1
	Video Input	
	S-Video	Mini DIN 4-pin x 1
	Composite Video	RCA jack x 1
	Component Video	RCA jack x 3, 15-pin mini D-sub x 1 (shared with computer In 1) BNC x 3 (shared with computer In 2)
	Audio Input	3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1
	Audio Output	RCA jack (L/R) x 1
	Network LAN Wired	RJ-45 port (10 base-T / 100 base-TX)
Network LAN Wireless	USB-A, IEEE802.11 b/g/n - optional wireless adapter required	
USB	Type A x 2 (PC-less presentation, wireless adapter) Type B x 1 (USB display or mouse control)	
Control Terminals	9-pin D-sub x 1 (RS-232 control)	
Ratings & Warranty	Power Supply	AC100-120V / AC220-240V, 50/60Hz
	Power Consumption	480W
	Operating Temperature	32°F - 113°F (0°C - 45°C)
	Dimensions (W x D x H)	19.6" x 15.6" x 5.3" (without lens)
	Weight	Approximately 19.3 lbs
	Approvals	UL 60950-1 / cUL FCC Part 15 subpart B class A
Warranty	3 year limited parts and labor. Extended Service Contract available (additional cost)	



* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

** Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.